


PRESS KIT/MAY 2009

**Lunar Reconnaissance Orbiter (LRO):  
Leading NASA's Way Back to the Moon**

**Lunar Crater Observation and Sensing Satellite (LCROSS):  
NASA's Mission to Search for Water on the Moon**



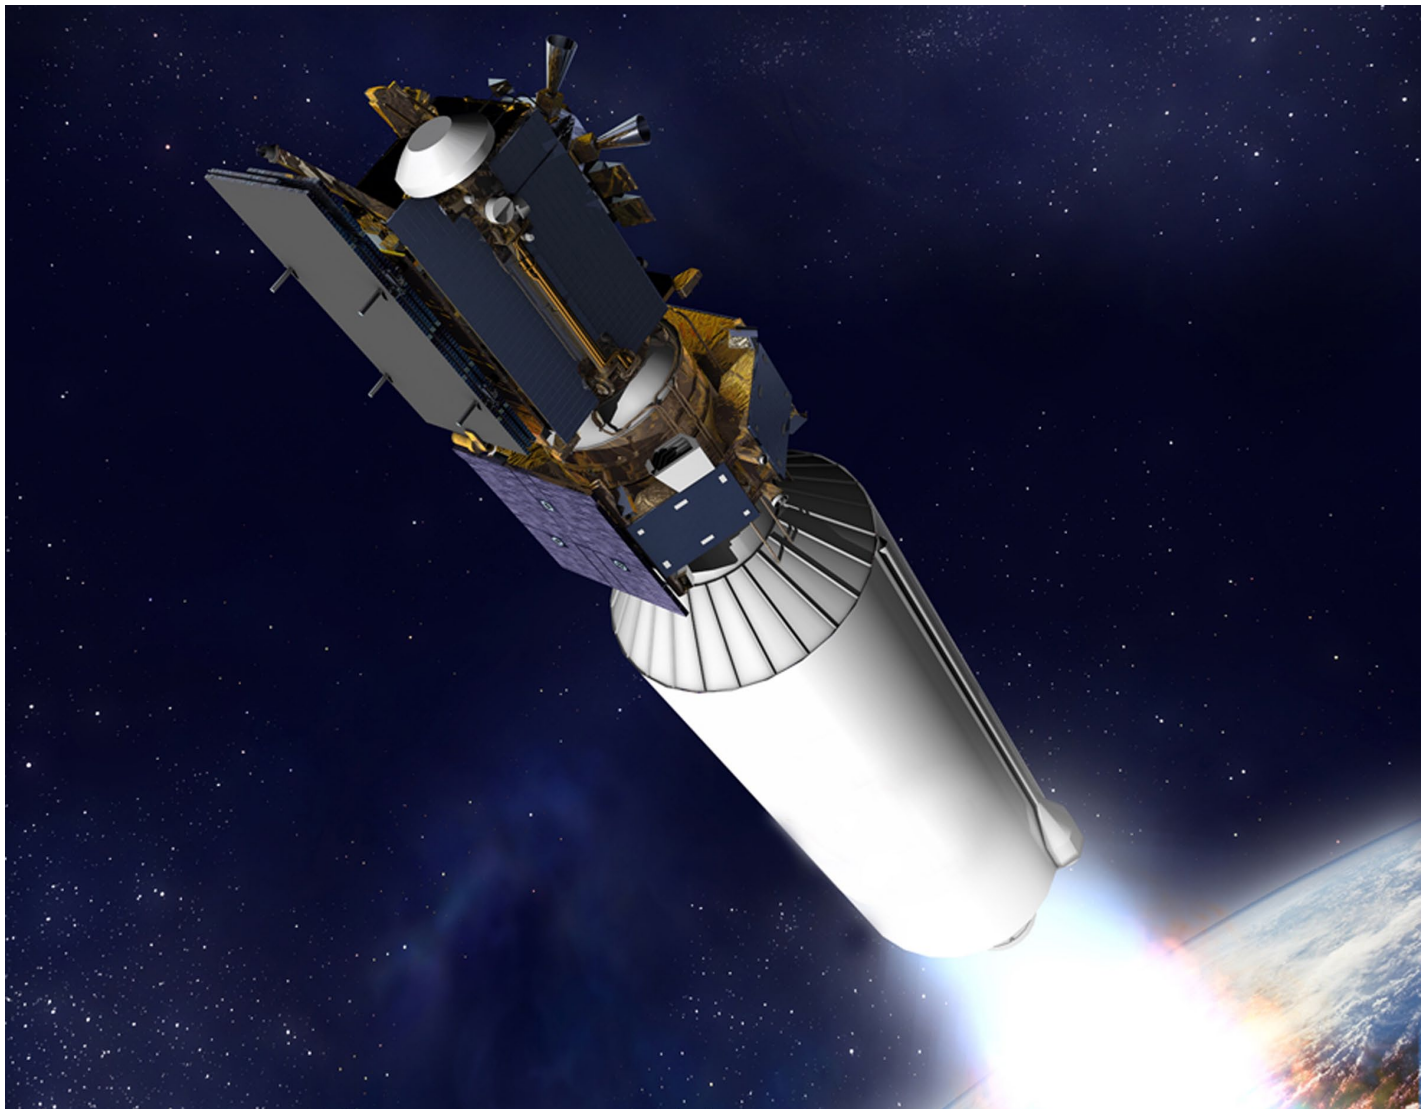

# Table of Contents

Contacts.....	1
Media Services Information.....	3
LRO/LCROSS Executive Summary .....	5
Mission Quick Facts.....	6
LRO Quick Facts .....	7
LCROSS Quick Facts.....	7
Launch Vehicle Mated With LRO/LCROSS .....	9
LRO/LCROSS Mission Trajectory .....	10
Why the Moon? .....	11
Historical Exploration of the Moon.....	14
LRO Mission Overview.....	15
LRO Mission at a Glance .....	16
LRO Instruments .....	17
LRO Across the Country.....	20
LRO Products and Benefits .....	21
LRO Spacecraft with Instruments .....	22
Treasure Hunting on the Moon: LRO and the Search for Water.....	23
Robot Scout: Fly Me (Safely) to the Moon .....	24
LCROSS Mission Overview .....	26
LCROSS Mission at a Glance .....	27
The Search for Water on the Moon.....	28
LCROSS Science Instruments.....	30
LCROSS Spacecraft .....	33
LCROSS Observation Campaign.....	35
Future NASA Lunar Missions .....	36
Program/Project Oversight .....	36





# Contacts

## Media Contacts

### **Grey Hautaluoma**

Exploration Systems Mission Directorate  
NASA Headquarters, Washington  
202-358-0668  
grey.hautaluoma-1@nasa.gov

### **Kimberly Newton**

Lunar Precursor Robotic Program  
Marshall Space Flight Center, Huntsville, Ala.  
256-544-0034  
kimberly.d.newton@nasa.gov

### **Nancy Neal Jones**

Lunar Reconnaissance Orbiter Project Office  
Goddard Space Flight Center, Greenbelt, Md.  
301-286-0039  
nancy.n.jones@nasa.gov

### **Jonas Dino**

Lunar CRater Observation and Sensing Satellite Project Office  
Ames Research Center, Moffett Field, Calif.  
650-604-5612  
jonas.dino@nasa.gov

### **George Diller**

Kennedy Space Center  
Kennedy Space Center, Fla.  
321-861-7643  
george.h.diller@nasa.gov

### **Mike Rein/Julie Andrews**

United Launch Alliance  
Cape Canaveral Air Force Station, Fla.  
321-730-5646/720-922-7121  
michael.j.rein@ulalaunch.com  
julie.c.andrews@ulalaunch.com

### **Sally Koris**

Northrop Grumman Aerospace Systems  
Redondo Beach, Calif.  
310-812-4721  
sally.koris@ngc.com

**LRO Principal Investigator  
Public Affairs Personnel**

**LOLA**

Nancy Neal Jones  
Goddard Space Flight Center  
301-286-0039  
nancy.n.jones@nasa.gov

**LAMP**

Maria Martinez  
Southwest Research Institute  
210-522-3305  
maria.martinez@swri.org

**LROC**

Nicole Staab  
Arizona State University  
480-965-5081  
nstaab@asu.edu

**DIVINER**

Stuart Wolpert  
University of California, Los Angeles  
310-206-0511  
swolpert@support.ucla.edu

David C. Agle  
Jet Propulsion Laboratory, Pasadena, Calif.  
818-393-9011  
david.c.agle@nasa.gov

**CRATER**

Ron Rosenberg  
Boston University  
617-358-1240  
ronrosen@bu.edu

**Mini-RF**

Mike Buckley/Kristi Marren  
Johns Hopkins University Applied Physics Laboratory  
240-228-7536/6268  
michael.buckley@jhuapl.edu  
kristi.marren@jhuapl.edu

**LCROSS Principal Investigator  
Public Affairs Personnel**

**Science Instrument Payload**

Jonas Dino  
Ames Research Center, Moffett Field, Calif.  
650-604-5612  
jonas.dino@nasa.gov

# Media Services Information

## NASA Television

In the continental United States, NASA Television's Public, Education and Media channels are carried by MPEG-2 digital C-band signal on AMC-6, at 72 degrees west longitude, Transponder 17C, 4040 MHz, vertical polarization. They are available in Alaska and Hawaii on an MPEG-2 digital C-band signal accessed via satellite AMC-7, transponder 18C, 137 degrees west longitude, 4060 MHz, vertical polarization. A Digital Video Broadcast-Compliant Integrated Receiver Decoder with modulation of QPSK/DBV, data rate of 36.86 and FEC 3/4 is required for reception.

## NASA TV Multichannel Broadcast Includes:

- Public Services Channel (Channel 101)
- Education Channel (Channel 102)
- Media Services Channel (Channel 103)

Analog NASA TV is no longer available. For digital downlink information for each NASA TV channel, schedule information for mission activities, and access to NASA TV's public channel on the Web, visit <<http://www.nasa.gov/ntv>>.

## Briefings

A mission and science overview news conference will be held at NASA Headquarters. The news conference will be broadcast live on NASA Television.

Prelaunch readiness press conference and mission science briefings will be held at 1 p.m. and 1:45 p.m. EDT (10 a.m. and 10:45 a.m. PDT), respectively, on Tuesday, June 16, 2009 (launch minus one day) in the Kennedy News Center at NASA Kennedy Space Center (KSC), Fl. These briefings will also be broadcast live on NASA Television. Media advisories will be issued in advance, outlining details of the news conferences.

## Accreditation and Media Access Badges for KSC and CCAFS

All news media, including those who are permanently badged, must complete the accreditation process for the activities associated with the LRO/LCROSS launch. The press accreditation process may be done via the Web by going to <<https://media.ksc.nasa.gov/>>.

Accreditation requests for the LRO/LCROSS prelaunch, launch, and postlaunch activities at KSC and Cape Canaveral Air Force Station (CCAFS) must be received by April 30 for foreign national news media and by May 13 for domestic news media. Foreign nationals must include full legal name, news organization, address, nationality/citizenship, passport number, and date of birth. For information about media accreditation, contact Laurel Lichtenberger in the KSC news media accreditation office at 321-867-4036.

## KSC News Center Hours for Launch

The NASA News Center at KSC will provide updates to the media advisories. Launch status reports will be recorded on the KSC news media codaphone that may be dialed at 321-867-2525 starting Tuesday, June 2, 2009.

## NASA Television Coverage

For information about NASA Television coverage of the launch, visit <<http://www.nasa.gov/multimedia/nasatv/digital.html>>.

## NASA Web Prelaunch and Launch Coverage

NASA's home on the Internet, <<http://www.nasa.gov>>, will provide extensive prelaunch and launch day coverage of the LRO/LCROSS missions.

To learn more about the LRO and LCROSS missions, visit:

<http://www.nasa.gov/lro>

<http://www.nasa.gov/lcross>

### **Postlaunch Coverage**

NASA Goddard Space Flight Center will have live mission coverage of LRO's lunar orbit insertion, which occurs approximately four days after launch. More information will be available at [<http://www.nasa.gov/lro>](http://www.nasa.gov/lro) about one week before launch.

NASA Ames Research Center will have live coverage of the lunar flyby maneuver five days after launch. More information will be available at [<http://www.nasa.gov/lcross>](http://www.nasa.gov/lcross) about one week before launch.

### **Multimedia Gallery**

Images, video, and animations for LRO and LCROSS can be found at:

LRO: <http://svs.gsfc.nasa.gov/Gallery/LunarReconnaissanceOrbiter.html>

LCROSS: [http://www.nasa.gov/mission\\_pages/LCROSS/multimedia/index.html](http://www.nasa.gov/mission_pages/LCROSS/multimedia/index.html)

### **Did You Know?**

The actual Earth-moon distance ranges from about 360,000 to 405,000 kilometers, depending on the moon's position in its orbit.

# LRO/LCROSS Executive Summary

NASA is returning to the moon, and one of the first steps in this vast endeavor will be the launch of the LRO and the LCROSS. When humans set foot on the lunar surface again in 2020, astronauts will begin to establish a long-term lunar outpost, and these two missions will have helped to set the stage.

The LRO is the first NASA mission to be flown as part of a bold new program to return Americans to the surface of the moon and is being developed and managed as part of NASA's Exploration Systems Mission Directorate (ESMD). LRO is a robotic mission, aimed at creating a comprehensive atlas of the moon's features and identifying available resources that will be necessary to design and build future lunar outposts.

LRO's launch date is scheduled for the early summer of 2009. LRO's objectives are to find safe landing sites, locate potential resources, characterize the radiation environment, and test new technology.

After launch, LRO's journey to the moon will take approximately four days. LRO will then enter an elliptical or "commissioning" orbit ( $30 \times 216$  km). During this period, the LRO spacecraft will be checked out and the scientific instrumentation suite will be activated and tested. After about sixty days, LRO will enter its operational circular polar orbit, 50 km (about 30 mi) above the moon's surface.

The LRO payload, comprised of seven instruments, will provide vital data to enable a human return to the moon. LRO will spend at least one year in low polar orbit around the moon, collecting detailed information about the lunar surface and environment. After a year, having collected the data for human mission planning, the spacecraft will be transferred to the Science Mission Directorate (SMD) and will be used for extended period of time to collect data relevant to scientific questions.

The LRO launch will also carry another spacecraft, LCROSS, which will attempt to determine if water ice occurs in areas of permanent shadow near the lunar poles.

LCROSS is a brief but spectacular mission that will help us answer one of the most intriguing scientific questions of our time: Does water ice exist on the moon? If the answer is yes, it could potentially be a useful resource to future astronauts. Whatever LCROSS discovers about the presence of water, it will increase our knowledge of the mineralogical makeup of some of the most remote areas on the moon — the deep polar craters where sunshine never reaches. People around the world will take part in observation campaigns to witness the mission's historic twin impacts on the lunar surface. LCROSS also represents a new generation of fast development, cost-capped missions that use flight-proven hardware and off-the-shelf software to achieve focused mission goals.

These companion missions, launched together on an Atlas V rocket, will mark the return of NASA to the moon and usher in a new era of scientific exploration and human engagement with our sister in the solar system. The moon is once again in our reach.

## Did You Know?

The radius of the moon is 1,080 miles (1,738 kilometers); the diameter is 2,160 miles (3,476 kilometers).

# Mission Quick Facts

## Mission

Launch Period: June 17, 2009 (3:51 p.m.–4:11 p.m. EDT)

Launch Site: Cape Canaveral Air Force Station, Fla, Launch Complex 41

Launch Vehicle: United Launch Alliance Atlas V (401)

Fuel: The first stage is powered by kerosene (RP–1) and liquid oxygen (LOX) and the Centaur upper stage is powered by liquid hydrogen (LH2) and LOX.

Orbit: LRO has a 31 miles (50 km) altitude circular lunar polar orbit.  
LCROSS has a Heliocentric Lunar Gravity-Assist, Lunar Return Orbit (LGALRO) at approximately 70 degrees from the ecliptic plane

Orbital Period: LRO orbit period is 113 minutes (Lunar Polar Orbit).  
LCROSS—Each LGALRO is approximately 38 days. The length of the mission is dependent on the number of orbits taken to maneuver the spacecraft for impact with the preferred target crater.

## Orbit

The trip to the moon will take approximately four days. LRO will then enter an elliptical orbit, also called the commissioning orbit. From there, it will be moved into its final orbit—a circular polar orbit approximately 50 kilometers (31 miles) above the moon's surface.

## Mission Operations Center

The Mission Operations Center (MOC) resides at NASA Goddard Space Flight in Greenbelt, Md. Engineers at Goddard will control the spacecraft after separation, during lunar orbit insertion, and for mission operations. The MOC flows raw data to principal investigators.

## Planetary Data System:

Principal investigators will deliver instrument data to the Planetary Data System within six months after launch. The Planetary Data System is a publicly accessible repository of science data for planetary missions.

## Project Cost

The project's life cost is approximately \$500 million.

## Instruments

CRaTER The Principal Investigator is Dr. Harlan Spence, Boston University, Boston, Mass. The instrument mass is 5.4 kilograms (12 pounds) and the average power is 7.3 watts.

Diviner The Principal Investigator is Dr. David Paige, University of California, Los Angeles, Calif. The instrument mass is 11.0 kilograms (24 pounds) with average power of 24.7 watts.

LAMP The Principal Investigator is Dr. Randy Gladstone, Southwest Research Institute, San Antonio, Texas. The instrument mass is 6.1 kilograms (13 pounds) and the average power is 4.0 watts.

LEND The Principal Investigator is Dr. Igor Mitrofanov, Institute for Space Research, Moscow, Russia. The instrument mass is 25.8 kilograms (57 pounds) and the average power is 11.6 watts.

LOLA The Principal Investigator is Dr. David Smith, NASA Goddard Space Flight Center, Greenbelt, Md. The instrument mass is 11.3 kilograms (25 pounds) and the average power is 33.4 watts.

LROC The Principal Investigator is Dr. Mark Robinson, Arizona State University, Tempe, Ariz. The instrument mass is 19.2 kilograms (42 pounds) and the average power is 24.0 watts.

Mini-RF The Principal Investigator is Dr. Stewart Nozette, Lunar and planetary institute, Houston, Texas. The instrument mass is 13.8 kilograms (30 pounds) and the average power is 7.0 watts.

## LRO Quick Facts

**Duration:** LRO has a one-year primary mission with a possible three-year extended mission.

**Mass:** The total mass at launch is 1,916 kilograms (4,224 pounds). The dry mass is 1,018 kilograms (2,244 pounds), and fuel is 898 kilograms (1,980 pounds).

**Power:** Spacecraft power is 685 watts.

**Dimensions:** Stowed in the rocket (solar array and high-gain antenna folded up), LRO is 152 inches tall. LRO measures 103 inches from the instrument module to the stowed solar array and 108 inches from the stowed high-gain antenna to Mini-RF antenna. After launch, LRO's deployed solar array is 168 inches × 126 inches. The three panels together are 168 inches wide and extend out from the spacecraft 126 inches. The deployed high-gain antenna extends out 102 inches.

**Fine Pointing:** The spacecraft maintains pointing control to 60 arc seconds.

**Solar Array:** The spacecraft has articulated solar arrays and Li-ion battery.

**Telemetry:** Telemetry is Ka-band hi-rate downlink and S-band up/down low rate

**Data Volume and Maximum Downlink Rate:** The data volume is 461 Gb per day and downlink is 100 Mb per second.

**Spacecraft Provider:** The spacecraft was built by engineers at NASA Goddard Space Flight Center in Greenbelt, Md.

## LCROSS Quick Facts

### Shepherding Spacecraft (S-S/C)

**Dimensions:** The overall size is 79 inches (2 m) tall and the basic structure is 103 inches (2.6 m) in diameter. From “omni -Z” to “omni +Z” antennae the spacecraft is 131 inches (3.3 m) wide.

**Mass:** The total mass at launch is 1,664 pounds (891 kg) consisting of 1,290 pounds (585 kg) for the spacecraft and 674.6 pounds (306 kg) of hydrazine fuel.

**Additional Information:** The max./min. range for the mass of the S-S/C at impact is max. = 866 kg, min. = 621 kg, and avg. = 743 kg. There are a number of factors that predict this mass at time of impact, including launch day.

(Source: Tom Luzod e-mail, March 23, 2009, to K. Ennico)

**Power:** Power to onboard systems is provided by a fixed 600-watt peak power solar array and a Li-ion battery. A star tracker assembly and 10 coarse sun sensors maintain orientation to the sun.

**Targeting Accuracy:** A targeting accuracy of 6.2 mile (10 km) is required, but actual targeting accuracy is expected to be 0.62 miles (1 km).

**Telemetry:** Spacecraft communications are provided through two medium gain antennas operating at 1.5 Mbps (nominal), two omnidirectional antennas operating at 40 Kbps (nominal), and a 7-watt S-band radio frequency transponder.

**Data:** Spacecraft data (engineering and housekeeping) and science instrument data are relayed in real time to the LCROSS mission and science operations teams.

**Spacecraft Provider:** Northrop Grumman Aerospace Systems, Redondo Beach, Calif., and Northrop Grumman Technical Services, Latham, Md.

**Build:** The spacecraft was designed and built at Northrop Grumman's Redondo Beach, Calif., facilities, and the science payload was designed and built at NASA's Ames Research Center, Moffett Field, Calif.

**Science Payload:** The science payload consists of two near-infrared spectrometers, an ultraviolet-visible light spectrometer, two mid-infrared cameras, two near-infrared cameras, a visible camera, and a visible high-speed photometer. Data from all nine instruments in the LCROSS science payload are managed through a common Data Handling Unit electronics unit.

**Mission Duration:** The LCROSS mission is a three-month to seven-month impactor mission to a permanently shadowed crater near one of the moon's poles depending on the time and date of launch and target crater.

**Operations:** Mission and science operations for the LCROSS mission are located at NASA Ames Research Center, Moffett Field, Calif.

**Project Cost:** The LCROSS mission costs \$79 million plus additional funding from the Lunar Robotic Precursor Program to cover the delays in launch from October 2008.

## Centaur Rocket

**Dimensions:** The Centaur rocket is 41.6 feet tall (12.68 m) and 10 feet in diameter. Attached to the LCROSS spacecraft, the stack measures 47 feet (14.5 m).

**Mass:** The total mass of the Centaur at impact is at most 5,216 pounds (2,366 kg).

## Lunar Approach

**Separation:** The Centaur and Shepherding Spacecraft will separate approximately nine hours and 40 minutes before Centaur impact at a height of about 54,059 miles (87,000 km) above the surface of the moon.

**180° Maneuver:** After separation from the Centaur, the Shepherding Spacecraft will perform a maneuver to create separation from the Centaur and orient the science payload toward the moon.

**Timing:** The Shepherding Spacecraft will impact the lunar surface four minutes after the Centaur impact.

## Impacts

**Speed:** At impact, the Centaur and Shepherding Spacecraft will be traveling approximately 1.55 miles per second (2.5 km/s).

**Angle:** The vehicles will impact the lunar surface at approximately 60–70 degrees to the lunar surface.

**Mass of Impactors:** At impact, the Centaur will range from a minimum of 4,958 pounds (2,249 kg) to a maximum of 5,216 pounds (2,366 kg). Nominal impact mass for the Centaur is 5,081 pounds (2,305 kg). The range for the impact mass of the Shepherding Spacecraft is a minimum of 1,369 pounds (621 kg) to a maximum of 1,909 pounds (866 kg).

**Impact Sizes:** The Centaur impact will excavate greater than 350 metric tons of lunar material and create a crater 92 feet (28 m) in diameter to a depth of 16 feet (5 m). The Shepherding Spacecraft impact will excavate an estimated 150 metric tons and with a crater 59 feet (18 m) in diameter to a depth of 11.5 feet (3.5 m).

**Plume Height:** Most of the material in the Centaur debris plume will remain at (lunar) altitudes below 6.2 miles (10 km).


**Target Crater:** The current target location is a permanently shadowed crater near the south pole. Final determination of the target crater will be announced 30 days before impact. The target's pole is determined at launch.

**Observation Campaign:** Professional and amateur astronomers are working with the LCROSS science team to coordinate the observations of the dual impacts of the LCROSS mission.



# Launch Vehicle Mated With LRO/LCROSS

## LRO/LCROSS Launch Configuration Atlas V 401

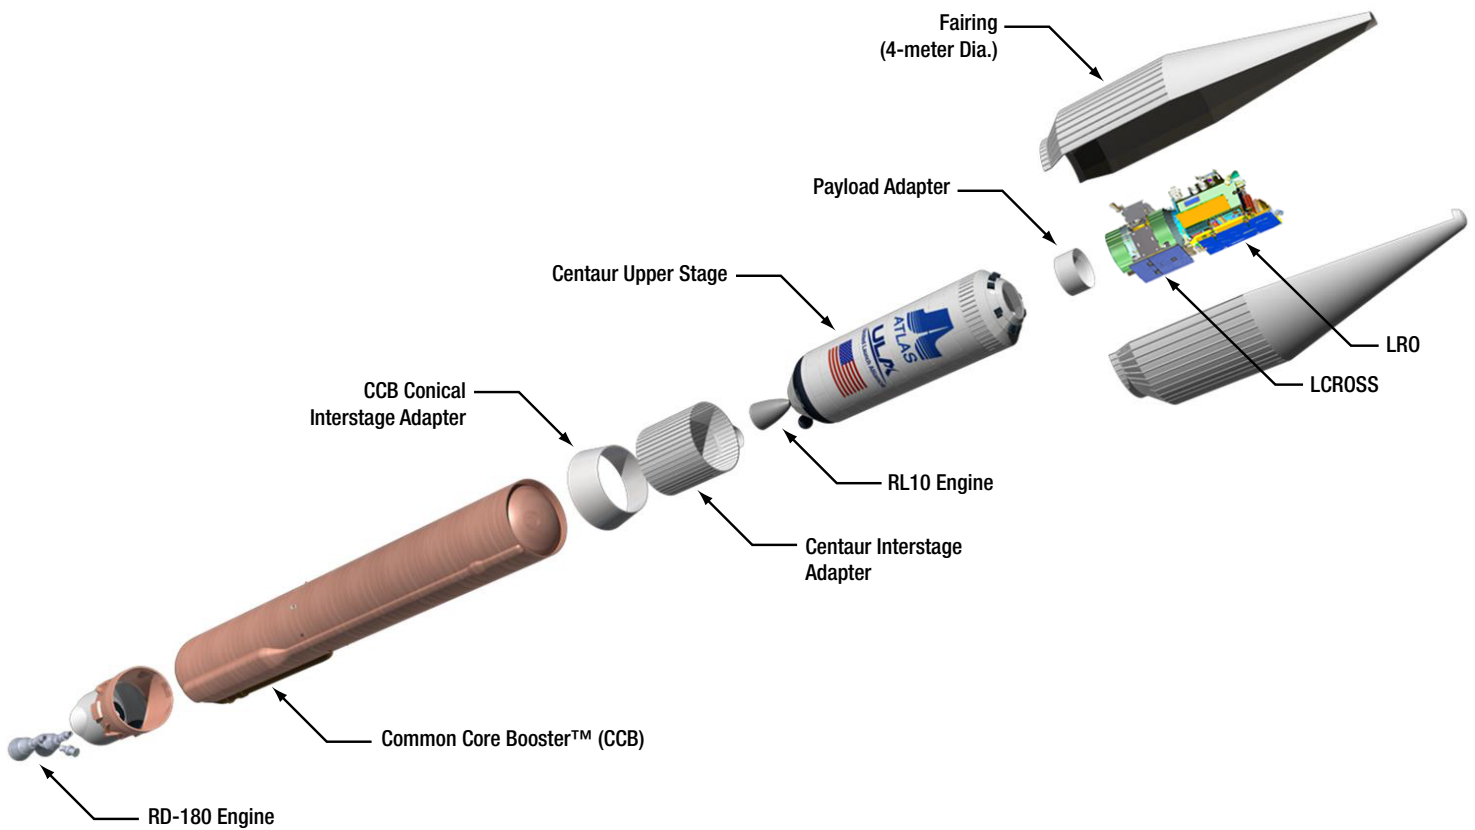


### Did You Know?

Total weight of the moon is 81 quintillion tons (74 sextillion kilograms).

The surface temperature at the equator during the day is 273 degrees F, 134 degrees C and at night is minus 244 degrees F (minus 153 degrees C).

# LRO/LCROSS Mission Trajectory

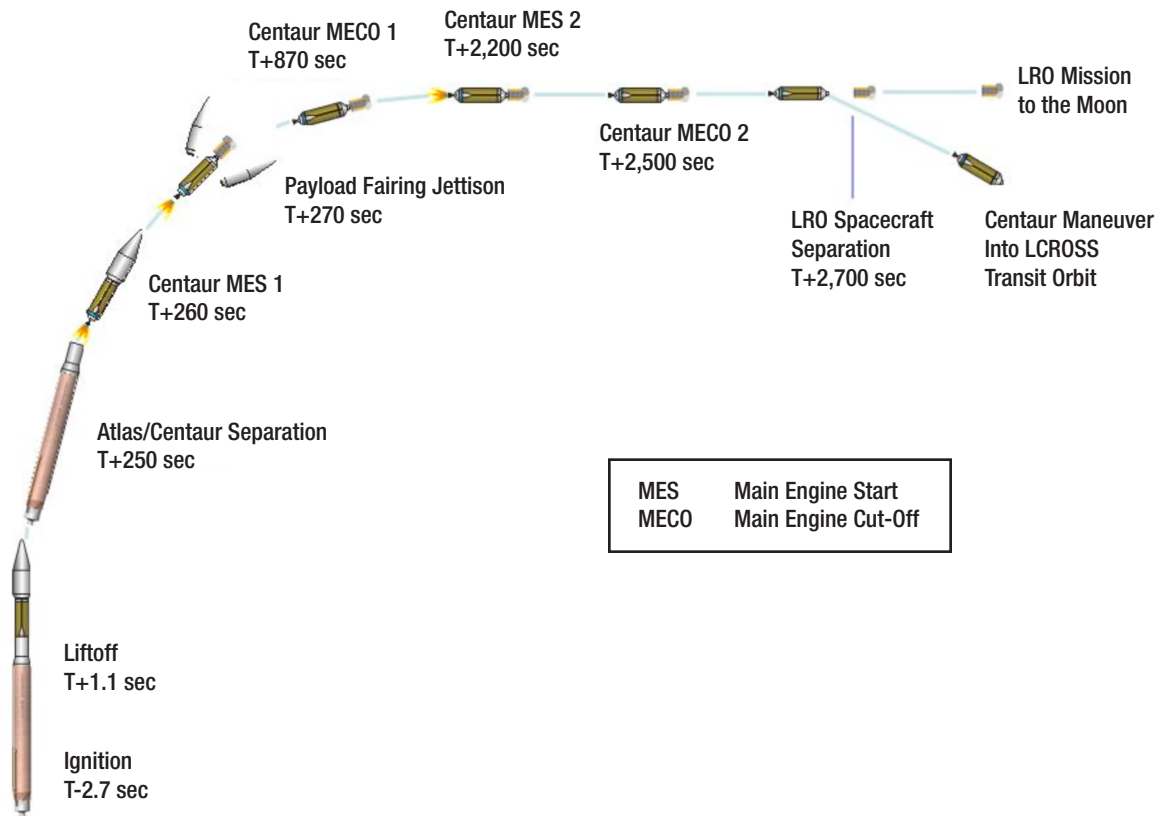

T- 2.7 sec	Ignition
T+ 1.1 sec	Liftoff
T+ 4 min 10 sec	Atlas/Centaur (EDUS) Separation
T+ 4 min 20 sec	Centaur Main Engine Start 1
T+ 4 min 30 sec	Payload Fairing Jettison
T+ 14 min 30 sec	Centaur Main Engine Cut-Off 1
T+ 36 min 42 sec	Centaur Main Engine Start 2
T+ 41 min 42 sec	Centaur Main Engine Cut-Off 2
T+ 45 min	Lunar Reconnaissance Orbiter Spacecraft Separation


## Did You Know?

Gravity at the surface of the moon is 1/6 that of the Earth.

The moon's magnetic field is less than 0.01 that of the Earth's.

# Why the Moon?

Imagine walking on another world. Imagine exploring a mysterious landscape that no other human has seen before. Imagine looking up and seeing the Earthrise over the Sea of Tranquility. We can and will do these things in your lifetime. And LRO is the first step in this incredible journey.

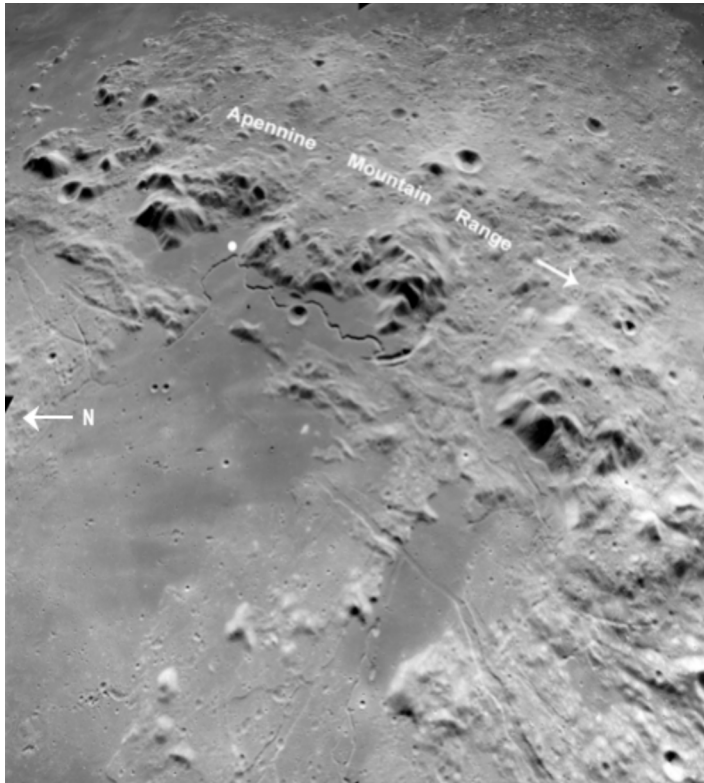

Apollo 15 metric photograph depicting Hadley Rille (the sinuous feature near the upper-center of the picture) and the lunar Apennine Mountains, which start at the upper left-hand corner of the image and extend to the right of the image. The white circle indicates the Apollo 15 landing site. (Apollo Image AS15-M-1422 [NASA/JSC/Arizona State University])

reduce the risk and cost of future human missions to asteroids, Mars, and beyond. Exploration activities will also expand humanity's economic sphere to conduct lunar activities with enormous benefits to life on our home planet, opening a new frontier of energy and vitality to American enterprise.

## A Moon Full of Opportunity

The moon is the Earth's nearest celestial neighbor. It is the brightest object in the night sky and has profoundly influenced the course of human civilization. For early humans, the moon provided lighting for hunting and defined when crops should be planted and harvested. Markings of lunar phases appear in cave paintings in France and defined the arrangement of Stonehenge. For modern humans, the moon is the next frontier.

The moon has almost the same surface area as the continent of Africa and is only four days away. It is therefore the perfect place to learn how to live and work in deep space, beyond the relative safety of low-Earth orbit. The overriding goal of United States Space Exploration Policy isn't simply to return to the moon or even merely send humans to Mars, but rather to extend human presence beyond low-Earth orbit and ultimately to any destination within the Solar System.

The current United States Space Exploration Policy represents a new direction. Our activities will teach us not merely how to survive, but how to thrive off-planet. Such a task includes inhabiting planetary surfaces, doing useful work while we are

Space exploration not only inspires us, it challenges and excites us. It gives us new perspectives on our problems. It expands job opportunities by opening up new economic opportunities—the exo-economy.

The moon itself is a geologic wonderland. There are mountains that are many miles high. Lava flows several hundreds of miles in length and there are enormous lava tubes and craters of every size. To date, only twelve human beings have set foot upon the moon, exploring only six locations on the lunar surface. There are spectacular vistas on the lunar surface that no human has yet seen—and equally spectacular scientific discoveries to be made. The knowledge gleaned from the fieldwork and sampling performed during the Apollo expeditions fundamentally changed our views of the Solar System and the larger universe around us. Science, however, is not static, and after 40 years of intensely studying the Apollo results there are exciting new scientific questions about the moon that need to be addressed.

Returning Americans to the moon will enable the pursuit of scientific activities that address fundamental questions about the history of Earth and moon, the Solar System and the Universe—and about our place in them. Lunar exploration will allow us to test technologies, systems, flight operation, and exploration techniques that will

there, and extracting what we need to live from the material and energy resources we find. We will use these new skills and techniques to build a space transportation infrastructure that permits routine access to the moon, low-Earth orbit, and everywhere in between, steps which will vastly reduce the cost of space operations.

With a viable lunar transportation infrastructure, satellites can be serviced, maintained, extended, and networked—space systems will be designed for an indefinite lifetime. Given existing launch costs, we cannot do this now. Even lowering such costs by an order of magnitude would still make even robotic servicing of platforms at geosynchronous orbit marginal at best. However, if we build a system that can be refueled using propellants manufactured on the moon, we create the capability to routinely go anywhere and do anything in cislunar (between the Earth and the moon) space. Utilizing off-planet resources is the beginning of true space-faring capability. Such a capability would unleash imaginations; realize potential; and expand technology, science, exploration, and commerce.

We are not going to the moon to simply explore the moon. We are returning to the moon for one clear and understandable reason—to enable humans to routinely leave the Earth. Mars, asteroids, and the outer planets beckon. The moon is our school, laboratory, and foundry. Lunar exploration will build a highway through the heart of cislunar space, creating a transportation infrastructure for diverse users: scientists, miners, sellers and buyers, and ultimately, settlers. In so doing, humans will derive immense benefits for all the peoples of Earth. Aside from the economic benefits, human lunar exploration shows the rest of the world that the enduring pioneer spirit of the United States of America opens a universe of limitless opportunity to our citizens and international partners in peace for all mankind. Imagine looking up in the night sky and knowing that humanity's first concrete steps into the larger universe are happening right over your head, with the United States leading the way.

## Scouting the Next Frontier

Of course, every great voyage begins with a first step. Existing lunar datasets (including Lunar Orbiter, Apollo, Clementine, and Lunar Prospector) are insufficient to completely plan future lunar operations, especially in areas outside of the so-called “Apollo Zone” (the front side near equatorial areas visited by the Apollo missions) where imagery is sparse or of low resolution. In fact, we have better maps of Mars than we do of our own moon! While ongoing lunar missions (including the Japanese Kaguya mission, the Chinese Chang'E mission, and the Indian Chandrayaan-1 mission) are collecting datasets of high scientific and exploration value, none will provide the complete dataset having the precision, accuracy, and resolution needed to support the projected engineering requirements of NASA's next-generation human lunar exploration architecture. The LRO will provide the critical imagery and remote sensing data that enables this daring new era of lunar exploration and development. LRO is the necessary first step on our journey to the moon, Mars, and beyond!

For additional information: [http://www.nasa.gov/exploration/home/why\\_moon.html](http://www.nasa.gov/exploration/home/why_moon.html)

### Did You Know?

The orbital speed of the moon is 2,287 mph (3,680 km per hour).





# WHY THE MOON?

## THE DAWN OF THE TRUE SPACE AGE LIES AHEAD OF US.

In the not-too-distant future, people around the world will be able to look through a telescope and see evidence of human and robotic exploration on the moon. In 2004, President Bush directed NASA to send humans back to the lunar surface – this time to stay – and to get ready for a journey to Mars. Since then, we've determined what transportation we'll need, set goals for our activities, identified real benefits of exploring the moon, and even started building the spacecraft to get us there. We'll spend 2007 maturing our ideas on the equipment that future lunar explorers will need to accomplish these exciting plans.

## WHATEVER WE DO, IT WILL BE FOR THE BENEFIT OF ALL MANKIND.



### Human Civilization

Extend human presence to the moon to enable eventual settlement.



### Global Partnerships

Provide a challenging, shared and peaceful activity that unites nations in pursuit of common objectives.



### Scientific Knowledge

Pursue scientific activities that address our fundamental questions about the history of Earth, the solar system and the universe -- and about our place in them.



### Economic Expansion

Expand Earth's economic sphere and conduct lunar activities with benefits to life on the home planet.



### Exploration Preparation

Test technologies, systems, flight operations and exploration techniques to reduce the risks and increase the productivity of future missions to Mars and beyond.



### Public Engagement

Use a vibrant space exploration program to engage the public, encourage students and help develop the high-tech workforce that will be required to address the challenges of tomorrow.

# BECAUSE HUMANS EXPLORE

*"The earth is the cradle of mind, but one cannot forever live in a cradle."*

– Konstantin Tsiolkovsky, 1896



# Historical Exploration of the Moon

Aristotle—the heavens, starting at the moon, were the realm of perfection, the sublunary region was the realm of change and corruption. Some of the moon’s contamination, Aristotle thought came from the realm of corruption.

Plutarch—suggested deep recesses on moon because sunlight did not reach spots, thought moon was a perfect mirror and its markings were reflections of Earthly features, also suggested variation in density in the moon.

- 1609 Lippershey invented the telescope.
- 1610 Italian astronomer Galileo Galilei made the first telescopic observation of the moon.
- 1610 Thomas Harriot and Galilei drew first telescopic representation of moon.
- 1645 Michael Florent van Langren made first map of moon.
- 1647 Johannes Hevelius published first treatise devoted to the moon.
- 1651 Giovanni Battista Riccioli named craters after philosophers and astronomers.
- 1753 Roger Joseph Boscovich proved the moon has no atmosphere.
- 1824 Franz von Gruithuisen thought craters were formed by meteor strikes.
- 1920 Robert Goddard suggested sending rockets to the moon.
- 1959 Soviet spacecraft Luna 2 reached the moon, impacting near the crater Autolycus.
- 1961 President John F. Kennedy proposed a manned lunar program.
- 1964 Ranger 7 produced the first close-up TV pictures of the lunar surface.
- 1966 Luna 9 made the first soft landing on the moon.
- 1967 Lunar Orbiter missions completed photographic mapping of the moon.
- 1968 Apollo 8 made the first manned flight to the moon, circling it 10 times before returning to Earth.
- 1969 Apollo 11 mission made the first landing on the moon and returned samples.
- 1972 Apollo 17 made the last manned landing of Apollo Program.
- 1976 Soviet Luna 24 returned the last sample of the moon.
- 1990 Galileo spacecraft obtained multispectral images of the western limb and part of the far side of the moon.
- 1994 Clementine mission conducted multispectral mapping of the moon.
- 1998 Lunar Prospector launched.
- 2004 NASA’s Vision for Exploration unveiled
- 2007 Japanese SELENE (Kaguya) launched.
- 2007 Chinese Chang’e 1 launched.
- 2008 Indian Chandrayaan 1 launched.

## Did You Know?

At the closest distance, it would take 135 days to drive by car at 70 mph to the moon.

# LRO Mission Overview

## Mission Objectives

The objectives of the LRO mission are to identify safe landing sites, locate potential resources, describe the current radiation environment, and demonstrate new technology.

The LRO spacecraft will be placed in low polar orbit (50 km) for a 1-year mission under NASA's Exploration Systems Mission Directorate. LRO will return global data, such as day-night temperature maps, a global geodetic grid, high-resolution color imaging and the moon's UV albedo. Particular emphasis will be focused on the polar regions where continuous access to solar illumination may be possible and the prospect of water ice in the permanently shadowed polar craters beckons. Although the objectives of LRO are exploratory in nature, the payload includes instruments with considerable heritage from previous planetary science missions, enabling transition after one year, to a science phase under NASA's Science Mission Directorate.

With a comprehensive dataset focused on supporting the extension of human presence in the solar system, LRO will help identify sites close to potential resources with high scientific value, favorable terrain and the environment necessary for safe future robotic and human lunar missions. All LRO data and the products produced from those data will be deposited in NASA's Planetary Data System (PDS), a publicly accessible repository of planetary science information. The raw and processed datasets will help the world develop a deeper understanding of the lunar environment, paving the way for a safe human return to the moon and for future human exploration of our Solar System.

## Mission Profile

LRO will launch on an Atlas V 401 rocket and the trip to the moon will take approximately four days. LRO will then enter an elliptical orbit, also called the commissioning orbit. From there, it will be moved into its final orbit—a circular polar orbit approximately 50 km (31 miles) above the moon's surface. LRO will spend at least one year in low polar orbit collecting detailed information about the moon and its environment.

### Did You Know?

The moon is actually moving away from Earth at a rate of 1.5 inches per year.




# LRO Mission at a Glance


**Launch Window opens: June 2, 2009**





**Minimum Energy  
Lunar Transfer~4 Days**

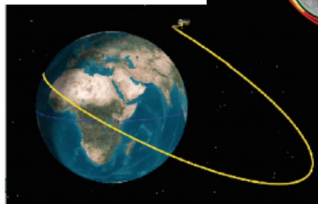

**Lunar Orbit Insertion  
Sequence, 4-6 days**

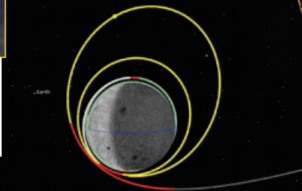

**Commissioning Phase  
30 x 216 k Altitude  
Quasi-Frozen Orbit,  
Up to 60 Days**

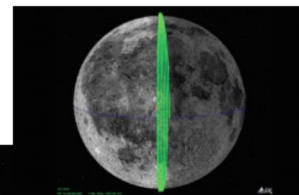

**Polar Mapping Phase  
50 km Altitude Circular Orbit  
At least 1 Year**




**Nominal End of Primary Mission: August 2010**

Phase	Entry	Exit	Duration	Objectives
Prelaunch	Start of LV count-down sequence	LV liftoff	~1 day	<ul style="list-style-type: none"> <li>Configure orbiter into launch mode</li> <li>Short spacecraft checkout</li> </ul>
Launch	LV liftoff	Payload separation	~90 minutes	<ul style="list-style-type: none"> <li>Achieve translunar trajectory</li> </ul>
Early cruise	Payload separation	Observing mode	~90 minutes	<ul style="list-style-type: none"> <li>Sun acquisition and ground acquisition</li> <li>Deployments</li> <li>Initial MCC Tracking</li> </ul>
Mid cruise	Observing mode	Completion of MCC	~1 day	<ul style="list-style-type: none"> <li>Propulsion checks</li> <li>Final MCC planning</li> <li>Execution of MCC burn within L+24 hrs</li> </ul>
Late cruise	Completion of MCC	Start of LOI sequence	3-4 days	<ul style="list-style-type: none"> <li>LEND/CRAaTER early turn-on activities</li> <li>Spacecraft functional checkout</li> <li>LOI planning</li> </ul>
Lunar Orbit Acquisition	Start of LOI sequence	Commissioning orbit	4-6 days	<ul style="list-style-type: none"> <li>Perform lunar orbit capture maneuver</li> <li>Achieve 30 x 216 km commissioning orbit</li> </ul>
Commissioning	Commissioning orbit	Mission orbit	Up to 60 days	<ul style="list-style-type: none"> <li>Spacecraft checkout and calibrations</li> <li>Instruments checkout and calibrations</li> <li>Mission orbit adjustment</li> </ul>
Nominal mission	Mission orbit	After 1-year nominal operations	1 year	<ul style="list-style-type: none"> <li>Routine operations</li> <li>Nonroutine operations</li> <li>Data product generation</li> </ul>
Extended mission	After 1-year nominal operations	Impact	Up to 3 additional years	<ul style="list-style-type: none"> <li>Goals to be determined</li> <li>Impact prediction/activities</li> </ul>
End of mission	Impact	Completion of close-out activities	N/A	<ul style="list-style-type: none"> <li>Finalize mission operations/activities</li> </ul>



# LRO Instruments

## Goals and Specifications

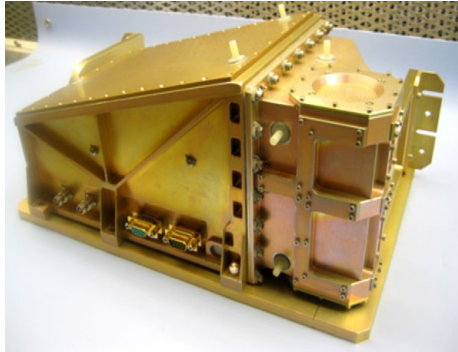


### Cosmic Ray Telescope for the Effects of Radiation (CRaTER) Goals


The primary goal of CRaTER is to characterize the lunar radiation environment in terms of the different types of charged particles and their energies, particularly above 10 MeV. Radiation comes from the sun and beyond the Solar System (galactic cosmic rays). These data will allow scientists to determine the potential biological impacts of the radiation. CRaTER will also test models of radiation effects and shielding and measure radiation absorption by human tissue-like plastic, aiding in the development of protective technologies to help keep crews safe.

### Instrumentation

CRaTER measures the energy deposited by cosmic rays over a wide energy range behind different amounts of tissue-equivalent plastic (TEP). Radiation passing through the telescope, including ions and electrons, and to a lesser extent neutrons and gamma rays, loses energy while passing through silicon detectors and the TEP. When ionizing radiation passes through a detector a signal is produced that is proportional to the total energy lost in the detector. Detectors are in pairs, one thicker and one thinner, which when combined, provide measurements of the linear energy transfer (LET) over the range of  $0.1 \text{ keV } \mu\text{m}^{-1}$  to  $2.2 \text{ MeV } \mu\text{m}^{-1}$ , a range relevant to radiobiology. Measured LET is used to understand how radiation loss

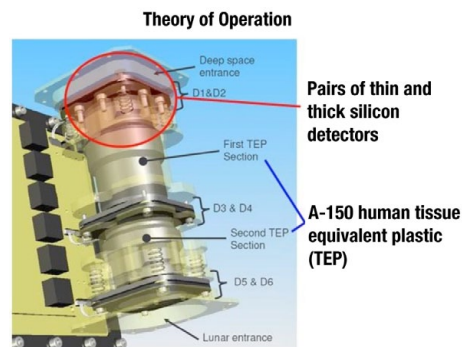

evolves in human tissue and how dose rates change during periods of heightened solar activity and ultimately over the course of the solar cycle. CRaTER will make the first direct, high-resolution measurements in deep space of the LET spectrum of energetic radiation. These data will be of major importance not only for human exploration but also for better understanding radiation effects in spacecraft systems.

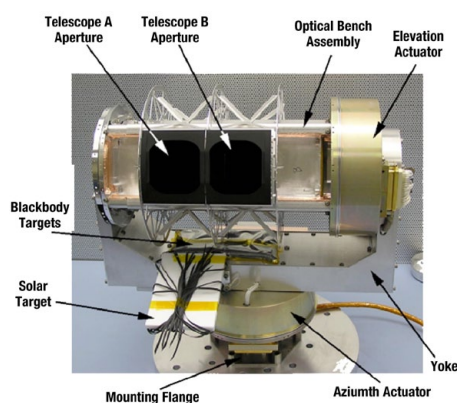

### Diviner Lunar Radiometer Experiment (DLRE) Goals


The objective of DLRE is to measure lunar surface temperatures at scales that provide essential information for future surface operations and exploration. The temperature of the lunar surface and subsurface is a critical environmental parameter for future human and robotic exploration. While the Apollo missions were all targeted to equatorial landing sites and were only conducted during the lunar day, NASA's new lunar exploration program will involve exploration of a much wider range of latitudes and astronaut stays of longer than two weeks. Both types of missions involve considerably more challenging thermal environments and will benefit greatly from a comprehensive global thermal mapping dataset that Diviner will provide. A key objective is to determine the temperatures within permanently

shadowed areas, which would be well below 100 K ( $-279^\circ\text{F}$ ), to understand the potential of these areas to harbor water ice. Orbital thermal mapping measurements also provide detailed information on surface parameters such as composition, hazards, rough terrain, or rocks.

### Instrumentation

The Diviner instrument will be able to determine surface temperatures to within  $5^\circ$  across areas as small as 300 m using 9 different wavelengths between 7 and 200 microns. The structure consists of an optics bench assembly, a motor driven elevation/azimuth yoke, and an instrument mount. The optics bench holds all of the optical subassemblies (the mirrors and detectors) and is suspended from the yoke. Motors on the yoke allow the instrument to be pointed in different directions and scan

across the surface. The instrument is temperature controlled. Radiometric calibration is provided by viewing of blackbody and solar targets mounted on the yoke.

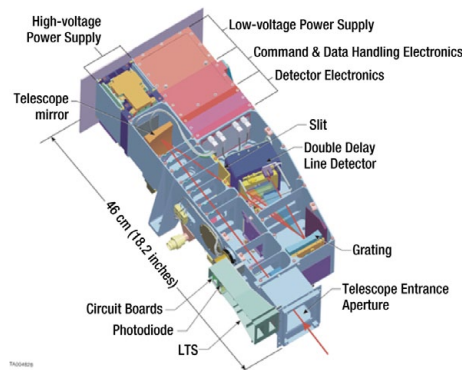

## Lyman Alpha Mapping Project (LAMP)

### Goals

The goal of the Lyman Alpha Mapping Project (LAMP) is to map the entire lunar surface in the far ultraviolet part of the spectrum. LAMP will search for surface ice and frost in the polar regions and provide images of permanently shadowed regions, illuminated only by starlight and the glow of interplanetary hydrogen emission, known as the Lyman Alpha line.

### Instrumentation

LAMP is an imaging ultraviolet spectrometer based on an instrument that is currently on its way to Pluto (the ALICE UV spectrometer). The instrument detects ultraviolet light between 1,200–1,800 Å. Building up data over the course of the mission will allow surface resolutions of a few kilometers with high signal-to-noise ratio.


## Lunar Exploration Neutron Detector (LEND)

### Goals

The Lunar Exploration Neutron Detector (LEND) will measure the neutron flux from the moon from thermal energies up to 15 MeV. LEND will create maps of surface and subsurface (down to ~1 meter) hydrogen distribution by measuring the epithermal neutron flux (0.4 eV–100 eV) with high-spatial resolution (10 km Full Width Half Maximum (FWHM)). LEND will be able to detect hydrogen in permanently shadowed craters near the lunar poles that may be water ice. Detection of water ice deposits will identify a critical resource for the future long-term human presence on the moon. LEND will also gather information about the neutron component of the lunar radiation environment, also extremely important for its impact on astronaut health.

### Instrumentation

LEND is a neutron spectrometer similar to another instrument, the High Energy Neutron Detector (HEND) that has been operating around Mars since 2001 on the Mars Odyssey spacecraft. The neutrons measured by these instruments are formed by cosmic-ray interactions with the planetary surface. If hydrogen is present, it will change the energy spectrum of those neutrons, providing quantitative information on hydrogen distribution. Unlike HEND, LEND is designed with a passive collimator that provides high spatial resolution (10 km FWHM) of neutron emission at the lunar surface. No other neutron instrument with this imaging capability has ever flown in space.

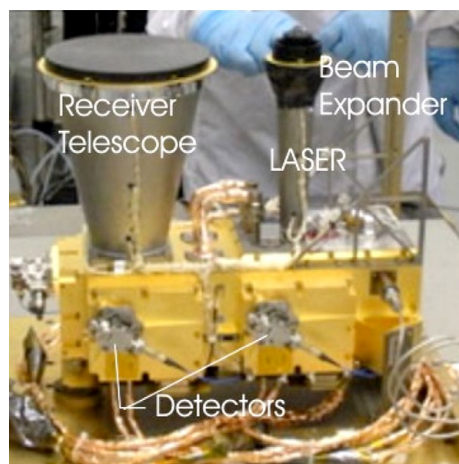

## Lunar Orbiter Laser Altimeter (LOLA)


### Goals

The Lunar Orbiter Laser Altimeter (LOLA) investigation will provide a precise global lunar topographic model and geodetic grid that will serve as the framework to enable precise target location, safe landing, and surface mobility to carry out exploratory activities. LOLA will also characterize the polar illumination environment by mapping the details of the topography, and image permanently shadowed polar regions of the moon to identify possible locations of surface ice crystals in shadowed polar craters.

Building on our previous experiences on the moon and Mars, we now know that topography at scales from local to global is necessary for landing safely. In addition, it preserves the record of the evolution of the surface that contributes to decisions as to where to explore.

## Instrumentation

The LOLA instrument pulses a single laser at 1,064 nm to produce five beams that illuminate the lunar surface. For each beam, LOLA measures time of flight (range), pulse spreading (surface roughness), and transmit/return energy (surface reflectance). This allows the topography to be determined, along with an indication of whether the surface is rough or smooth at small scales and any changes in the surface brightness. With its two dimensional spot pattern, LOLA unambiguously determines slopes along and across the orbit track.

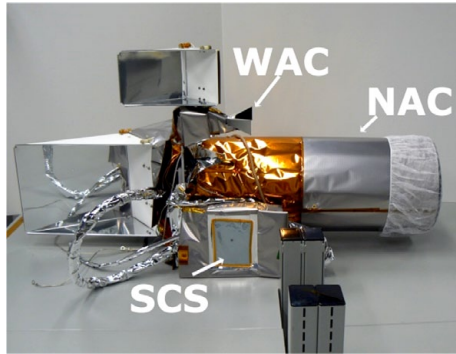

One of the two LROC Narrow Angle Cameras (NAC), the Wide Angle Camera (WAC), and the Sequence and Compressor System (SCS) during ground testing at Malin Space Science Systems.


## Lunar Reconnaissance Orbiter Camera (LROC)

### Goals

LROC is designed to address two of the prime LRO measurement requirements: (1) Assess meter scale features to facilitate selection of future landing sites on the moon, and (2) acquire images of the poles every orbit to characterize the polar illumination environment (100-meter scale), identifying regions of permanent shadow and permanent or near-permanent illumination throughout a full lunar year. In addition to these two main objectives, the LROC team plans to conduct meter-scale mapping of polar regions, 3-dimensional observations to enable derivation of meter-scale surface features, global multispectral imaging, and production of a global landform map. LROC images will also be used to map and determine current impact hazards by rephotographing Apollo images.

### Instrumentation

LROC consists of two narrow-angle cameras (NACs) to provide 0.5-meter-scale panchromatic images over a 5-km swath, a wide-angle camera (WAC) to provide images at a scale of 100 meter in seven color bands over a 60-km swath, and a Sequence and Compressor System (SCS) supporting data acquisition for both cameras. LROC is a modified version of the Mars Reconnaissance Orbiter's ConTeXt Camera (CTX) and MARs Color Imager (MARCI) provided by Malin Space Science Systems (MSSS) in San Diego, Calif.

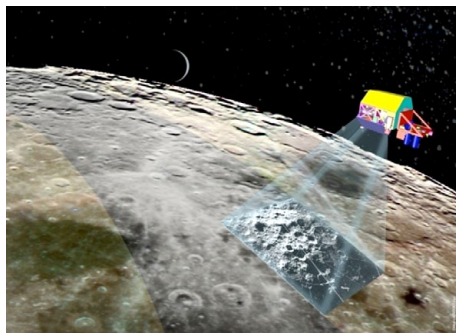

## Mini-RF

### Goals

Mini-RF on LRO will provide observations of the permanently shadowed areas by using radar illumination of the surface at resolutions of 30 and 150 meters. The returned data will also be used to define the manner in which the radar energy is scattered and reflected back to the spacecraft. Depending upon the characteristics of the reflected energy, it will be possible to determine if ice is present in significant quantities in the areas of permanent shadow. Because radar uses wavelengths of 8–12 GHz (X band) and 2 GHz (S band) it is sensitive to surface roughness (rocks) and can be used to map rock distribution. A less


advanced version of this instrument is being flown on the Chandrayaan-1 mission and those data will be used to guide the higher resolution and more advanced measurements made by Mini-RF.

### Instrumentation

The Mini-RF is a technology demonstration of an advanced synthetic aperture radar (SAR), capable of measurements in X-band and S-band. Mini-RF will demonstrate new lightweight SAR, communication technologies, and locate potential water ice. The Mini-RF instrument consists of electronic boxes and an antenna. The antenna is mounted on the side of the spacecraft and it points at an angle of 50°. An image is produced by the motion of the spacecraft.



## LRO Across the Country

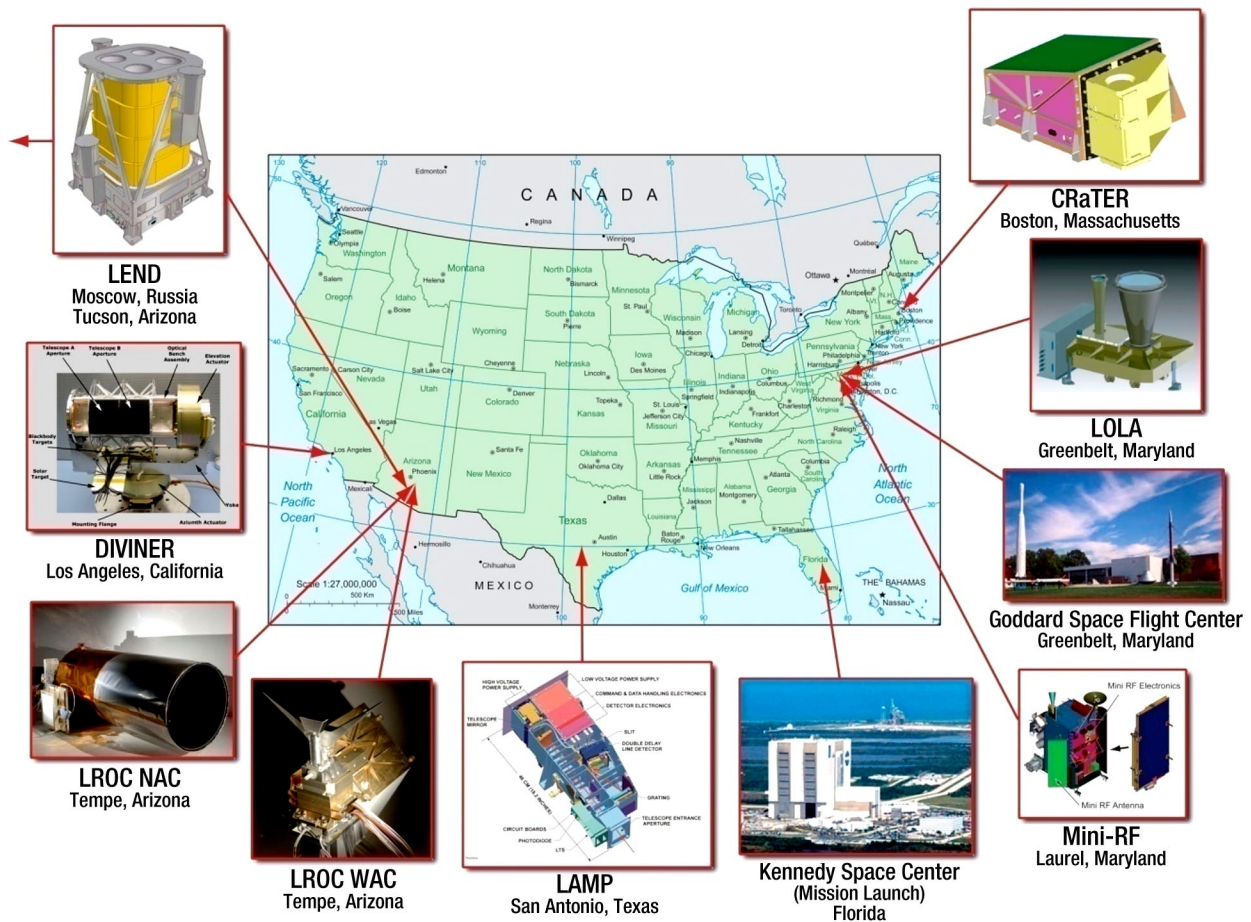

LEND	Laboratory for Space Gamma-Ray Spectroscopy, Institute for Space Research, Moscow, Russia (with Operations Centers at University of Arizona and University of Maryland)
DIVINER	Earth and Space Science Department, University of California Los Angeles, Los Angeles, Calif.
LROC	School of Earth and Space Exploration, Arizona State University, Tempe, Ariz.
LAMP	Space Science and Engineering Division, Southwest Research Institute, San Antonio, Texas.
MINI RF	Universities Space Research Association/Lunar and Planetary Institute, 3600 Bay Area Blvd., Houston, Texas.
LOLA	NASA's Goddard Space Flight Center, Greenbelt, Md.
CRaTER	Department of Astronomy, Boston University, Boston, Mass.

### Did You Know?

The moon's widest craters are 1,553 miles (2,500 km) in diameter.

## LRO Products and Benefits


Instrument	Example Key Data Products	Example of Exploration Benefits	Example of Science Benefits
LOLA Lunar Orbiter Laser Altimeter	50-m polar topography at 1-m vertical accuracy, global topography, surface slopes, and roughness.	Identify safe landing sites, image shadowed regions, map potential surface ice, improve gravity field model.	Global topography and gravity for interior structure and geological evolution.
LROC Lunar Reconnaissance Orbiter Camera	Thousands of 50-cm/pixel images, and entire moon at 100 m in UV, Visible. Polar illumination conditions.	Surface landing hazards, locations of near constant solar illumination.	Impact and volcanic processes, resource evaluation, and crustal evolution.
LEND Lunar Exploration Neutron Detector	Maps of hydrogen in upper 1 m of moon at 10-km scales, neutron albedo.	Locate potential water ice in lunar soil or concentrations of implanted hydrogen.	Distribution, sources, and history of polar volatiles.
DLRE Diviner Lunar Radiometer Experiment	500-m scale maps of surface temperature, albedo, rock abundance, and ice stability.	Measures thermal environment in permanent shadow and permanent light ice stability depth map.	
LAMP Lyman Alpha Mapping Project	Maps of frosts and landforms in permanently shadowed regions (PSRs).	Locate potential water ice on the surface, image shadowed areas, and map potential landing areas in PSRs.	
CRaTER Cosmic Ray Telescope for the Effects of Radiation	Lunar and deep space radiation environment and tissue equivalent plastic response to radiation.	Safe, lighter weight space vehicles. Radiation environment for human presences at the moon and journeys to Mars and beyond.	Radiation boundary conditions for biological response. Map radiation reflected from lunar surface.
Mini-RF Technology Demonstration	X- and S-band radar imaging and interferometry.	Demonstrate new lightweight SAR and communication technologies, locate potential water ice.	Source, history, deposition of polar volatiles.

### Did You Know?

From Earth, we always see the same side of the moon.

# LRO Spacecraft With Instruments

## Instrument Panel View and Avionics Panel View

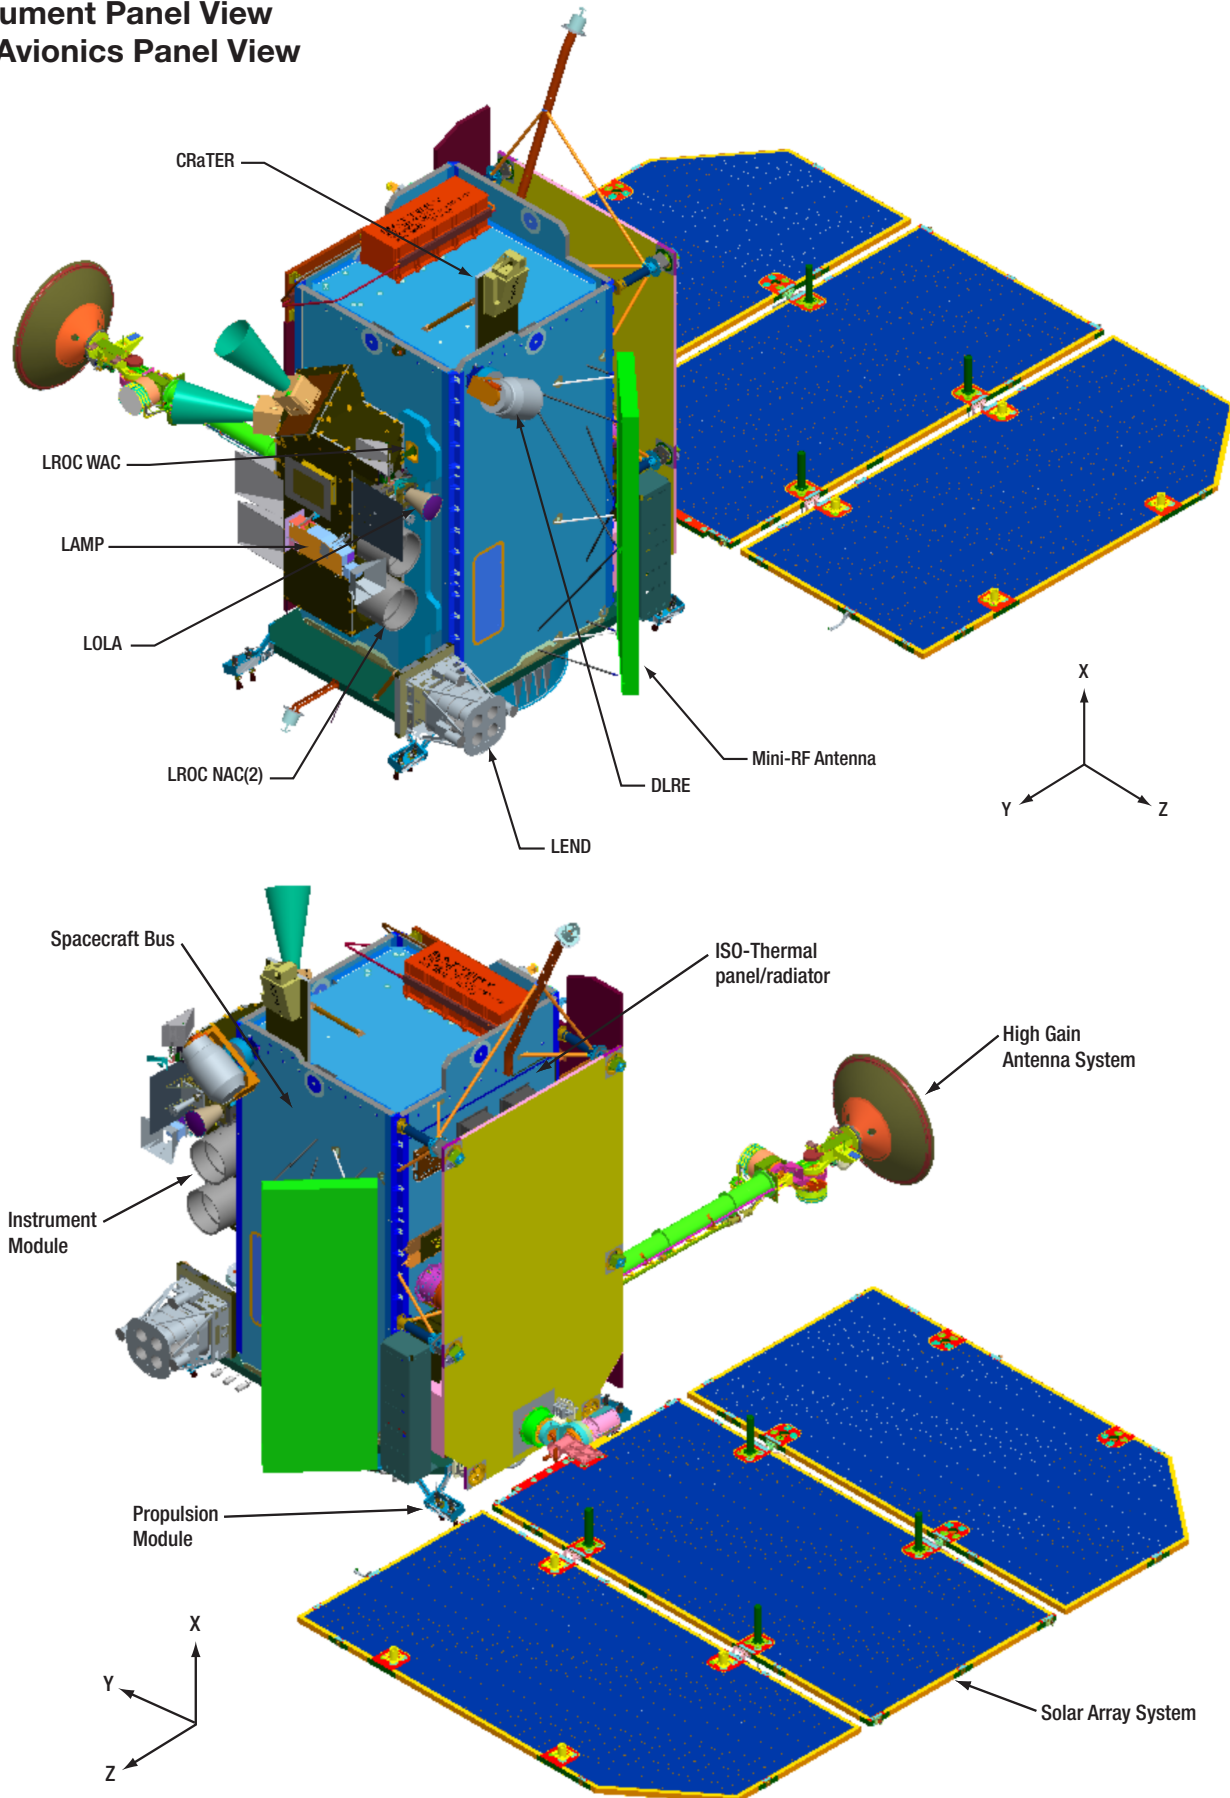

# Treasure Hunting on the Moon: LRO and the Search for Water

A bottle of one of the most expensive brands of water costs \$40 and is presented in a frosted glass container decorated with crystal. On the moon, a bottle of water would run about \$50,000 and forget about that heavy crystal glass. That is because it costs around \$50,000 per pound to launch anything to the moon. Discovering water on the moon would be like finding a gold mine.

In fact, scientists have discovered evidence for water or hydrogen, a component of water, in special places on the moon. Since the moon is not tilted much from its rotation axis, the depths of certain craters in the lunar poles may not have seen the sun for billions of years. The long night over these areas, called Permanently Shaded Regions (PSRs), will have made them very cold and able to trap hydrogen or water molecules as ice.

However, with almost no atmosphere, most of the moon is drier than the driest terrestrial desert. How could water get on the moon in the first place? Some scientists believe water vapor from past comet impacts has migrated across the lunar surface to the poles to become embedded in the soil at the bottom of these dark craters. Others believe hydrogen was also embedded in the lunar soil in these polar cold traps over time. The hydrogen comes from the sun and is carried to the moon by the solar wind, a thin gas that is continuously blowing off of the solar surface and fills the entire solar system. Most of the solar wind is hydrogen.

Among its many missions, the spacecraft will help identify the most likely places to find hydrogen or ice deposits on the moon.

Lunar water could be used for more than just drinking. It could be broken down into hydrogen and oxygen for use as rocket fuel and breathable air. Even sufficient concentrations of hydrogen by itself would be valuable, because it could be used as fuel or combined with oxygen from the soil to make water.

With launch costs so high, it will be much cheaper to mine the moon for hydrogen or ice than to haul water up from Earth. Naturally, this assumes there is enough of this resource there, and it is technically feasible to mine. As useful as lunar water deposits would be, without evidence that they exist, they are just wishful thinking by mission planners.

Clementine, a small probe launched by NASA and the U.S. Department of Defense in 1994, gave the first piece of evidence. The probe directed a radio transmitter toward the lunar polar regions, and antennas at Earth picked up the reflections. More evidence came in 1998 from NASA's Lunar Prospector mission. The measurement used the presence of hydrogen as a sign of potential ice deposits. The moon is constantly hit by cosmic rays, particles moving at almost the speed of light that come from explosions on the sun and in space. These particles strike the lunar soil and, like the break at the start of a pool game, create a shower of other particles. Neutrons, a component of the center of atoms, are among these particles, and some fly back out into space.

These neutrons were detected by an instrument on Lunar Prospector. The neutrons scattered back into space normally have a wide range of speeds. However, if the neutrons hit hydrogen atoms in the lunar soil before being ejected into space, the impacts will quickly slow them down.

As Lunar Prospector scanned the lunar surface, its neutron counters recorded the number of neutrons moving at speeds in the middle of the range. Over the polar regions, the counters detected a decrease in the number of neutrons moving at mid-range speeds. This meant that many neutrons were being suddenly slowed by impacts with hydrogen, so there is probably a concentration of hydrogen or even water ice somewhere in the lunar poles.

However, the measurements could not tell whether the deposits were hydrogen or ice, nor did they have the resolution to accurately locate the deposits within the polar zones. LRO will be able to do both.

LRO has a camera system with both wide-angle and high-resolution cameras, called the Lunar Reconnaissance Orbiter Camera (LROC). As LRO orbits over the poles, the moon rotates beneath the spacecraft, and the cameras will gradually

build up a detailed picture of the region. Scientists using LROC will combine the images it takes during a year in orbit to make a movie that reveals the regions in permanently shadowed regions (PSRs). These areas will be the most promising places to search for hydrogen or ice.

The spacecraft also has a neutron detector with much better resolution than Lunar Prospector's, called the Lunar Exploration Neutron Detector (LEND). The detector can locate hydrogen deposits to an area about 10 kilometers (about 6.2 miles) across. This is smaller than the estimated size of most PSRs.

LEND will be able to detect hydrogen or ice that is buried up to about a meter (3.2 feet) below the surface. The deposits are expected to gradually be buried by material thrown out from tiny micrometeorite impacts that constantly bombard the moon.

LRO's Diviner instrument measures temperature. It will be directed at the PSRs to see if they are really cold enough to trap hydrogen or water molecules for billions of years.

PSR temperature depends on the shape and depth of the craters. Although the bottoms may be in permanent shadow, the sun is likely to rise high enough to appear over the rims and illuminate the sides. Sunlight reflected from the sides could strike the bottom and warm it enough so that any ice would evaporate before it can be buried.

LRO includes a laser ranging system that will build an elevation map to show the contours of the polar craters. The instrument, called the Lunar Orbiter Laser Altimeter (LOLA), records the time it takes for a laser pulse to travel from the spacecraft to the lunar surface and back to calculate the height of the lunar terrain. After a year in orbit aboard LRO, LOLA will have created an elevation map of the polar regions that is accurate to within a half-meter (20 inches) vertically and 50 meters (about 160 feet) horizontally. It will be used to rule out craters with the wrong shape to store hydrogen or ice.

PSRs will, of course, be dark. The job of LRO's Lyman Alpha Mapping Project (LAMP) is to see in the dark. It is sensitive enough to make pictures of the crater depths using reflected light from stars and glowing interstellar gas (actually a specific type of ultraviolet light, called Lyman Alpha, which like all ultraviolet light is invisible to the human eye). Also, any ice on the surface of the PSRs will leave a distinct imprint in the reflected light, definitively revealing its presence.

An experimental radio transmitter and receiver on board LRO, called Mini-RF, also could detect ice deposits on the surface and beneath it as well. Ice deposits will change the reflected radio signal in a specific way, revealing their presence.

Multiple instruments are the power of the LRO mission. LRO can verify that water or hydrogen is present with several independent techniques.

## Robot Scout: Fly Me (Safely) to the Moon

The first attempt to land humans on the moon—Apollo 11—was a triumph that almost ended in disaster. At just 400 feet from the lunar surface, with only about a minute's worth of fuel remaining, astronauts Neil Armstrong and Edwin "Buzz" Aldrin saw that their ship's computer was taking them directly into a crater the size of a football field, strewn with SUV-sized boulders. They quickly took control from the computer, flew over the crater, and touched down in a smoother area beyond, cutting the engine with just 30 seconds of fuel on the readout.

As good as they were for their time (1960s), NASA's navigation capabilities weren't good enough to avoid this nasty surprise. The landings for NASA's return to the moon are likely to be even more challenging. Mission planners want to be able to set down on the edge of enormous craters in the polar regions, because the crater rims will be bathed in gentle but nearly-permanent sunlight. Steady sunshine provides a reliable source of power for long-term expeditions.

NASA's LRO instruments will work together to build a complete, detailed picture of potential landing sites. In general, good landing sites need to be level and free from large boulders that could damage or tip the spacecraft as it attempts to land. But



they also need to be close to interesting areas, either for exploration and science, or for access to resources. The Apollo missions were pure exploration and science, and landed at various sites near the lunar equator. NASA's return to the moon is more ambitious, and planners are aiming at the poles not just for the science, but for the potential to use the moon's resources to "live off the land." It is up to LRO to make those landings as safe as possible.

The first task is to get a good look at the poles. LRO features a camera, called the Wide Angle Camera (WAC), which will use color filters to give information on possible resources based on the colors reflected from the lunar surface. It will also combine the images it takes throughout a year in orbit to make a movie that reveals areas getting the most sunlight, including any PIRs. The movie will also show the regions in permanent shadow, called PSRs. These very cold areas will be the most promising places to search for hydrogen or ice.

LRO also carries a pair of eagle-eyed cameras, called the Narrow Angle Cameras (NACs), which together can take images that reveal details as small as a meter (almost 40 inches) over swaths 10 kilometers (about 6.2 miles) wide. As LRO orbits over the poles, the moon rotates beneath the spacecraft, and the NACs gradually build up a detailed picture of the region. It will be used to identify safe landing zones free of large boulders and craters, allowing astronauts to avoid surprises like those during Apollo 11.

LRO will use data from another instrument that measures temperatures to doublecheck the safe zone map. Temperatures change more slowly in areas with loose materials (lots of rocks), because the loose material is not well connected to the surface. By analyzing how quickly temperatures change in potential landing zones, planners using the instrument, named Diviner, can rule out areas that appear smooth but actually are likely to be rocky.

Astronauts also want to avoid places with steep slopes that could tip the spacecraft, so LRO includes a laser ranging system that will build an elevation map to show the contours of the polar surface. The instrument, called LOLA, records the time it takes for a laser pulse to travel from the spacecraft to the lunar surface and back to calculate the height of the lunar terrain. After a year in orbit aboard LRO, LOLA will have created an elevation map of the polar regions that is accurate to within a half-meter (almost 20 inches) vertically and 50 meters (about 160 feet) horizontally.

LOLA will also be used to doublecheck surface roughness. If the surface is smooth, the reflected laser signal will sharply rise in intensity. If it is rough, the signal will be ragged; the intensity will go up and down as the laser scatters off of rocks at different angles.

However, in order to precisely calculate LRO's distance from the lunar surface, scientists have to know its position in space accurately. Mission scientists will track LRO with two techniques, one using radio transmissions from the spacecraft measured by a dedicated antenna at NASA's White Sands Test Facility, Las Cruces, N.M., complemented by measurements from antennas at other stations. The second tracking method uses lasers fired at the spacecraft from Goddard.

## LCROSS Mission Overview

Earth's closest neighbor, the moon, is holding a secret. In 1999, hints of this secret were revealed in the form of concentrated hydrogen signatures detected in permanently shadowed craters near the lunar poles by NASA's Lunar Prospector. These readings may be an indication of lunar water and could have far-reaching implications as humans expand exploration past low-Earth orbit. The LCROSS mission is seeking a definitive answer.

In April 2006, NASA selected the LCROSS proposal for a low-cost, fast-track companion mission to the LRO, scheduled to launch in 2009. The main LCROSS mission objective is to confirm if and in what form water may exist in one of these permanently shadowed craters.

LCROSS is scheduled to launch with the LRO aboard an Atlas V rocket from Cape Canaveral, FL, in 2009. After launch, LRO will separate from LCROSS and continue on to the moon. The LCROSS (shepherding) spacecraft will retain the Atlas V's Centaur upper stage rocket and use it as the primary impactor for the mission, something that has never been done with a Centaur. After sufficient distance from LRO is achieved, the shepherding spacecraft and the Centaur will perform a "blow-down" maneuver to vent any remaining fuel inside the Centaur to help prevent contamination of the impact site.

Five days later, the shepherding spacecraft and the Centaur will execute a flyby of the moon and enter into an elongated Earth orbit to position LCROSS for impact on a lunar pole. This elongated orbit portion of the mission is expected to be four months. The exact length of time is dependent on the exact time of launch and is calculated to satisfy a number of competing mission constraints, including hitting a specific target crater, timing the impact to achieve proper illumination of the debris plume at the time of impact, and staying within spacecraft propellant limits.

On final approach, LCROSS and the Centaur will separate. The Centaur will act as the first impactor to create a debris plume with some of the heavier material reaching a height of up to 6.2 miles (10 km) above the lunar surface. Following four minutes behind, the LCROSS will fly through the debris plume, collecting and relaying data back to Earth before impacting the lunar surface and creating a second debris plume.

Lunar orbiting satellites and Earth-based telescopes on the ground and in orbit will observe the impacts and resulting debris plumes. The impacts are expected to be visible from Earth using telescopes 10-to-12 inches and larger. Data from these multiple sources will be used in preparation for the eventual return of humans to the moon.

The LCROSS science payload consists of two near-infrared spectrometers, a visible light spectrometer, two mid-infrared cameras, two near-infrared cameras, a visible camera, and a visible radiometer. The LCROSS instrument payload was designed to provide mission scientists with multiple complimentary views of the debris plume created by the Centaur impact.


As the debris plume rises above the target crater's rim, it is exposed to sunlight and any water ice, hydrocarbons, or organics will vaporize and break down into their basic components. These components primarily will be monitored by the visible and infrared spectrometers. The near-infrared and mid-infrared cameras will determine the total amount and distribution of water in the debris plume. The spacecraft's visible camera will track the impact location and the behavior of the debris plume while the visible photometer will measure the flash created by the Centaur impact.

LCROSS is a fast-paced, low-cost, mission that leverages select NASA flight-ready systems, commercial-off-the-shelf components, the spacecraft expertise of Northrop Grumman Aerospace Systems, Redondo Beach, Calif, and the experience gained from NASA's Lunar Prospector mission. NASA Ames Research Center, Moffett Field, Calif, is managing the mission, conducting mission operations, and developing the payload instruments, while Northrop Grumman designed and built the spacecraft for this innovative mission. Ames mission scientists will spearhead the data collection and analysis.

## LCROSS Mission at a Glance




LRO and LCROSS launch together from Cape Canaveral. After sufficient distance from LRO is achieved, the shepherding spacecraft and the Centaur will perform a “blowdown” maneuver to vent any remaining fuel inside the Centaur to help prevent contamination of the impact site.

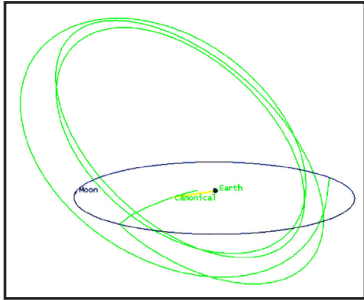

Five days after launch, the spacecraft and Centaur fly by the moon and enter into a Lunar Gravity Assist, Lunar Return Orbit (LGALRO) to position it for impact with the target lunar pole. Each LGALRO takes approximately 37 days.



On final approach to the moon, less than 10 hours before impact, the shepherding spacecraft and Centaur separate. LCROSS performs a braking maneuver to create separation and rotates 180 degrees to point its instrument payload toward the moon.

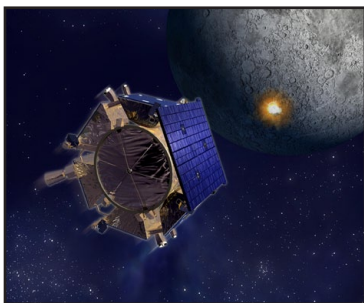

The spacecraft collects data on the Centaur impact flash and resulting debris plume and relays it back to LCROSS Mission Control. Four minutes later, the LCROSS spacecraft impacts the lunar surface creating a second debris plume.

### Did You Know?

On July 20, 1969, Neil Armstrong became the first human being to set foot on the moon.

# The Search for Water on the Moon

If water exists on the moon, it arrived the same way water did on Earth. Through billions of years of bombardment by meteors and comets, water or the components of water were deposited on the Earth and the moon. Since the moon's gravity is less than one fifth of Earth's gravity, the moon has practically no atmosphere. Any light elements or compounds deposited on the moon's surface are subject to direct exposure to the vacuum of space and solar radiation.

Over the course of a lunar day, about 29 Earth days, all exposed surfaces of the moon are bathed in sunlight. With daylight temperatures reaching up to 250° Fahrenheit (233° C.), any water ice exposed to sunlight for any length of time would turn into water vapor, break apart and be lost to space.

At the lunar poles, the sun never rises above certain crater rims and therefore these crater floors may not have seen sunlight for billions of years. With temperature estimated to be near minus 328° Fahrenheit (–200° C), these craters can 'cold trap' or capture most volatiles. Any water released to the surface of the moon from possible outgassing, or deposited by comet fragments and meteorites, would be trapped in these craters.

## Science Objectives

The moon is the most prominent object in our night sky yet more is known about Mars than the moon. What is known about the moon is gathered by Earth-based telescopes and from the Apollo missions and small lunar robotic missions. In the 1990s, two of these small robotic missions, Clementine and Lunar Prospector, found evidence of possible water ice at the lunar poles. Unfortunately, the evidence is not conclusive. The LCROSS mission seeks a definitive answer to the question of lunar water. If water is present, it could present a valuable resource in the human quest to explore the solar system.

The main science objectives for the LCROSS mission include the following:

- Confirm the presence or absence of water ice in a permanently shadowed region on the moon.
- Identify the cause of the hydrogen signatures detected at the lunar poles.
- Determine the amount of water, if present, in the lunar regolith or soil.
- Determine the composition of the regolith in one of the moon's permanently shadowed crater.

The LCROSS mission will be the first in situ, or in-place study, of these pristine permanently shadowed craters.

The primary goal of LCROSS is to measure the concentration of water ice (ice to dust ratio) in permanently shadowed lunar regolith or soil. When the Centaur, weighing up to 5,216 pounds (2366 kg) or about the weight of a large sports utility vehicle, impacts the floor of a permanently shadowed crater at 1.55 miles per second (2.5 km/s,) there is an initial flash followed by the creation of a debris plume. If water ice is present on the floor of the crater, it will be thrown skyward. Once above the crater rim, it will be exposed to solar radiation breaking the molecules of water into hydrogen ions and hydroxyl ions.

The LCROSS spacecraft, following four minutes behind, will collect and transmit data back to LCROSS Mission Control about the debris plume using the nine onboard science instruments before impacting the surface. A possible result of both of the impacts is the creation of a temporary thin atmosphere of hydroxyl ions. This resulting atmosphere could be detectable using telescopes on and orbiting the Earth and satellites in lunar orbit.

## LCROSS Impacts

To maximize the creation of a debris plume, the impacts of the Centaur rocket and the LCROSS shepherding spacecraft need sufficient speed and a high angle of impact. Engineers have estimated that the Centaur and LCROSS spacecraft will impact the lunar surface at approximately 1.55 miles per second (2.5 km/s), five times faster than a bullet fired from a .44 Magnum. The projected angle of impact is approximately 60–70 degrees with respect to the lunar surface.

To achieve this high angle of impact, the LCROSS spacecraft and the Centaur will execute a flyby of the moon approximately five days after launch entering into an extended LGLRO. This portion of the mission is expected to be four months.

The exact length of the LGALRO is dependent on exact time of launch and is calculated to satisfy a number of mission constraints including achieving the targeted crater and the correct phase and tilt of the moon for proper illumination of the debris plume at the time of impact.

At launch, the LCROSS team will announce the lunar pole and the primary target crater. Factoring any additional information, a final determination of the target crater will be made 30 days before impact.

On final approach to the moon, the LCROSS spacecraft and the Centaur will separate. The shepherding spacecraft will perform a braking maneuver and will reorient to point the instrument payload to capture the Centaur impact. After the Centaur impacts, the LCROSS spacecraft will have up to 4 minutes of data collection and transmit that data back to LCROSS Mission Control.

LCROSS is required to achieve a targeting accuracy of approximately 6.2 miles (10 km.), but is expected to be significantly more accurate (<0.62 miles or 1 km).

The Centaur impact crater is expected to be approximately 91.9 feet (28 m) in diameter by 16.4 feet (5 m) deep, while the LCROSS spacecraft impact crater is expected to be approximately 59 feet (18 m) in diameter by 11.5 feet (3.5 m) deep. The impact is expected to create a very brief visible flash that will last less than 100 milliseconds. Most of the excavated material or ejecta will be thrown upward at a velocity of more than 820 feet per second (250 m/sec.)

Studies using the Ames Vertical Gun Range indicate the LCROSS impacts will create a significantly larger crater than Lunar Prospector (LP) that impacted the moon at 1 mile/sec (1.7 km/sec) with a mass of 348 pounds (158 kg) at a glancing angle of 6 degrees.

## **Did You Know?**

The age of the oldest moon rock collected is 4.5 billion years old.

The rocks collected by Apollo astronauts weigh in at 842 pounds (382 kg).








# LCROSS Science Instruments

After LCROSS was accepted to fly as a companion mission to the LRO, the LCROSS payload team conducted an extensive process to select the components needed for an effective science payload. The payload team assembled a set of instruments that could collect data from different features of the Centaur impact but would be complementary to each other. This maximizes the science return by providing redundancy and robustness.

The science payload consists of a total of nine instruments consisting of one visible, two near infrared, and two mid-infrared cameras; one visible and two near-infrared spectrometers; and a photometer. A data handling unit (DHU) collects the information from each instrument for transmission back to LCROSS Mission Control. Due to the schedule and budget constraints, the LCROSS team took full advantage of available rugged, commercially available components.

Although the selected instruments are considered rugged for their intended uses on Earth, space is a harsh environment. The LCROSS payload team put the individual instruments through a rigorous testing cycle that simulated launch and the conditions of space. The team identified design weakness and modifications for space use and worked with the manufacturers to strengthen their designs. The payload was assembled and underwent additional tests to determine how the system worked together. Once the payload met all testing criteria and the team was satisfied, it was shipped to Northrop Grumman, Redondo Beach, Calif., for integration into the LCROSS spacecraft.

Instrument checkout and calibration will be performed during the swing-by of the moon 5 days after launch. One hour prior to impact, instruments will be powered on and will return data until impact of the spacecraft.


LCROSS Payload Science Instrument	Sponsorship	Measurement
 <b>Visible Camera</b> (1 total)	Ecliptic Enterprises	<ul style="list-style-type: none"> <li>• Visible context imagery</li> <li>• Monitor ejecta cloud morphology</li> <li>• Determine visible grain properties</li> </ul>
 <b>Near Infrared Cameras</b> (2 total)	Goodrich Sensors Unlimited	<ul style="list-style-type: none"> <li>• NIR (0.9–1.7 um) context imagery</li> <li>• Monitor ejecta cloud morphology</li> <li>• Determine NIR grain properties</li> <li>• Water concentration maps</li> </ul>
 <b>Mid-Infrared Cameras</b> (2 total)	Thermoteknix (black case) Indigo (gold case)	<ul style="list-style-type: none"> <li>• MIR (6.0–13.5 um) thermal image</li> <li>• Monitor the ejecta cloud morphology</li> <li>• Determine MIR grain properties</li> <li>• Measure thermal evolution of ejecta cloud</li> <li>• Remnant crater imagery</li> </ul>
 <b>Visible Spectrometer</b> (1 total)	Ocean Optics	<ul style="list-style-type: none"> <li>• Visible (263–650 nm) emission and reflectance spectrometry of vapor plume, ejecta cloud</li> <li>• Measure grain properties</li> <li>• Measure emission H2O vapor dissociation, OH- (308 nm) and H2O+(619nm) fluorescence</li> </ul>
 <b>Near Infrared Spectrometers</b> (2 total)	Polychromix	<ul style="list-style-type: none"> <li>• NIR (1.2–2.4um) emission and reflectance spectrometry of vapor plume, ejecta cloud</li> <li>• Measure grain properties</li> <li>• Measure broad H2O ice features</li> <li>• Occultation viewer to measure water vapor absorption by cloud particles</li> </ul>
 <b>Total Luminance Photometer (TLP)</b> (1 total)	NASA Ames Research Center	<ul style="list-style-type: none"> <li>• Measures total impact flash luminance (425–1,000 nm), magnitude, and decay of luminance curve</li> </ul>
 <b>Data Handling Unit (DHU)</b> (1 total)	Ecliptic Enterprises	<ul style="list-style-type: none"> <li>• Instrument control and data acquisition</li> </ul>



## R6 Panel: LCROSS Science Payload

Top View

- A Payload Observation Deck (POD)
- B Total Luminance Photometer (TLP) Digital Electronics Module (DEM)
- C Data Handling Unit (DHU)
- D Visible Spectrometer (VSP) Viewer
- E Near Infrared Spectrometer 1 (NSP1) Viewer
- F Near Infrared Spectrometer 2 (NSP2) Viewer

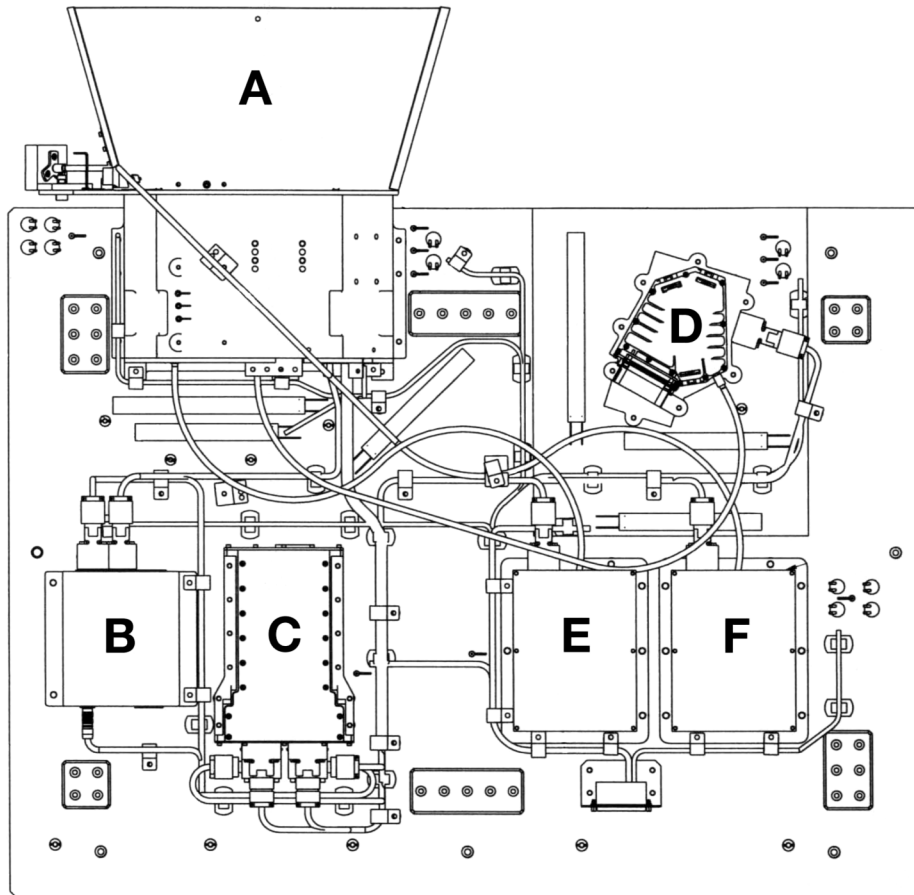

### Did You Know?

The moon's highest mountains are 5.6 miles high (9 km).



The lunar day (or the time from sunrise to sunrise) on the moon is approximately 708 hours (29.5 days).

## LCROSS Science Payload Observation Deck (POD)

- G Near Infrared Spectrometer 2 (NSP2) Nadir Fore-Optics
- H Near Infrared Spectrometer 1 (NSP1) Nadir Fore-Optics
- I Visible Spectrometer (VSP) Nadir Fore-Optics
- J Mid-Infrared Camera 2 (MIR2)
- K Mid-Infrared Camera 1 (MIR1)
- L Visible Camera (VIS)
- M Near Infrared Camera 1 (NIR1)
- N Near Infrared Camera 2 (NIR2)
- O Total Luminance Photometer (TLP)



Cleaning crew preparing LCROSS instrument payload for shipment to Northrop Grumman.

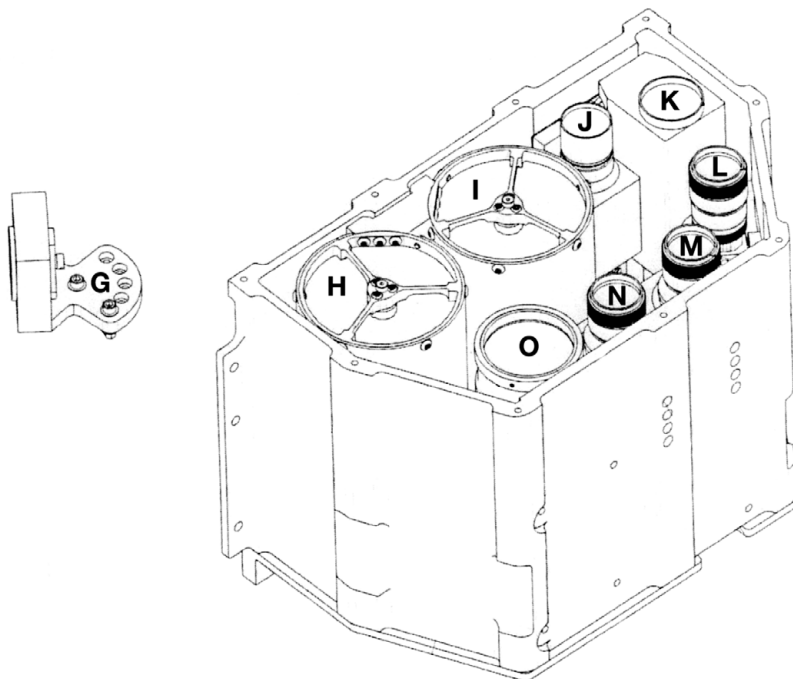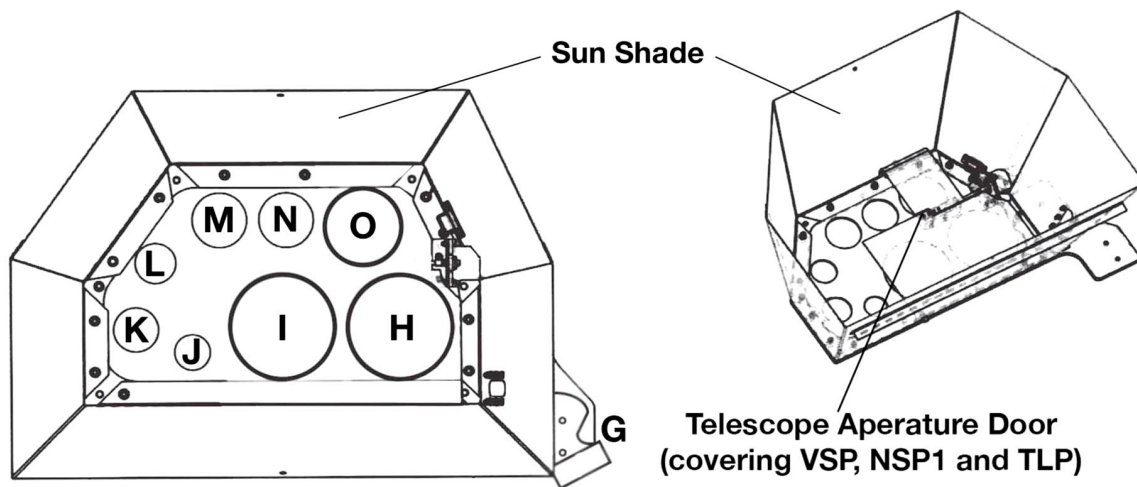

### Did You Know?

The surface area of the moon is 37,914,863 square km.

If you weigh 120 pounds, you would weigh only 20 pounds on the moon.




# LCROSS Spacecraft

LCROSS is a fast-track, low-cost, companion mission to the LRO. The LCROSS mission takes advantage of the structural capabilities of the Evolved Expendable Launch Vehicle Secondary Payload Adapter (ESPA) ring, used to attach LRO to the Centaur upper stage rocket. Mounted on the outside of the ESPA are six panels that hold the spacecraft's science payload, command and control systems, communications equipment, batteries, and solar panels. A small monopropellant-propulsion system is mounted inside of the ring. Also attached to the ring are two S-Band omni antennas, and two medium-gain antennas.

The mission's strict schedule, mass, and budget constraints forced engineering teams from NASA Ames Research Center and Northrop Grumman to think "outside-the-box." This thinking led to a unique use of the ESPA ring and innovative sourcing of other spacecraft components. Usually, the ESPA ring is used as a platform to hold six small deployable satellites; for LCROSS, it became the backbone of the satellite, a first for the ring. LCROSS also takes advantage of commercially available instruments and uses many of the already flight-verified components used on LRO.

The NASA Ames Research Center, Moffett Field, Calif., is overseeing the development of the LCROSS mission. Northrop Grumman, Redondo Beach, Calif., the LCROSS spacecraft and integration partner, designed and built the spacecraft for this innovative mission.

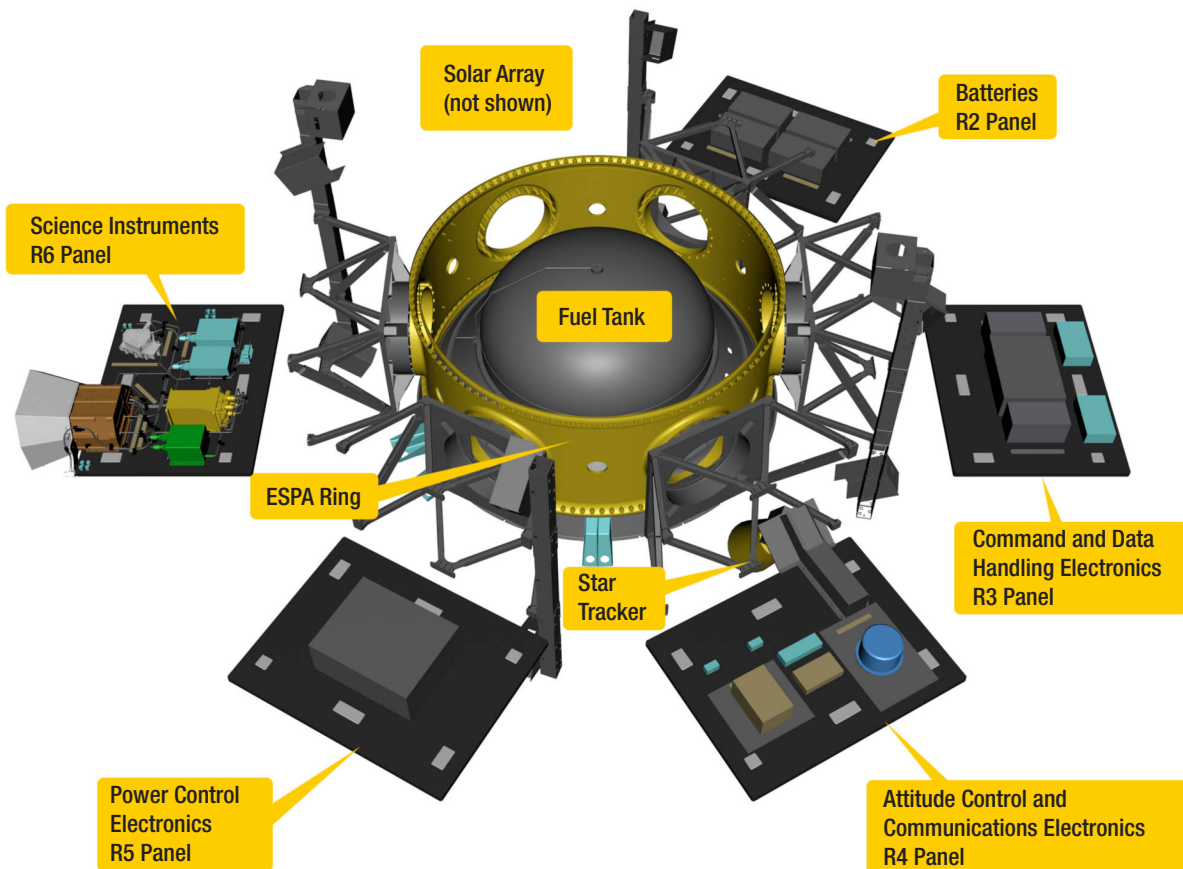


## Did You Know?

The moon has no significant atmosphere or clouds.

There are no active volcanoes on the moon.

## LCROSS Mission Timeline

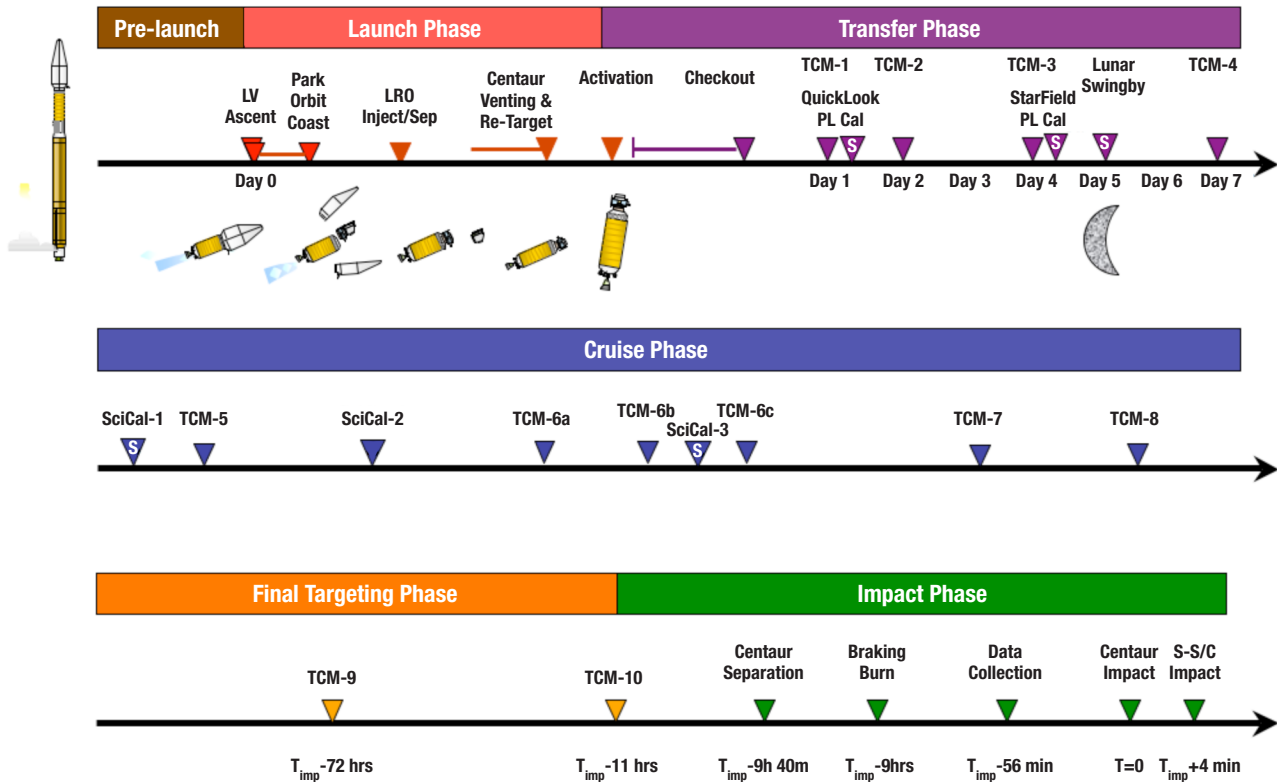

LV Launch Vehicle  
 TCM Trajectory Correction Maneuver  
 EDUS Earth Departure Upper Stage  
 SS/C Shepherding Spacecraft

### Did You Know?

The Lunar Prospector spacecraft found evidence that suggests water ice may be present in the permanently shadowed areas of the lunar poles.

# LCROSS Observation Campaign

## Professional Astronomers

As with the 2005 Deep Impact mission to Comet Temple 1, the planned impact of the LCROSS mission into a PSR crater near a lunar pole is generating excitement in the professional astronomer community. The LCROSS mission will provide this community the opportunity to capture a known impact on the surface of the moon.

The LCROSS Observation Campaign is designed to share expertise and resources in order to maximize the data collection and subsequent analysis of this unique event.

Unlike observing a distant star or nebulae, observing a specific event on the moon poses significant challenges for large telescopes used by professional astronomers. The moon is extremely bright and moves rapidly compared to the background stars. For a large telescope to observe the moon, numerous procedures have to be implemented including the installation of special filters to block excess light and positioning of the telescope to track the target's location.

The LCROSS Science Team is developing and practicing procedures to help direct large telescopes to the correct location of the impacts. In November 2008, scientists created a composite image of possible impact sites using observation data collected using NASA's Infrared Telescope Facility (IRTF) located atop Mauna Kea on the Big Island of Hawaii.

This mosaic is available to astronomers interested in viewing the impacts. The observation campaign will release mosaic images produced from future observation runs. On the night of lunar impacts, a similar mosaic will be obtained at the IRTF and shared with other professional astronomers along with offset coordinates from identified craters. The mosaic will enable astronomers to confirm their pointing position to the LCROSS impact sites using the exact lighting and libration, the wobble of the moon on its axis, on that day. Also, the LCROSS team will be in direct communications with professional astronomers providing real-time targeting data and coordinates.

As part of the LCROSS Observation Campaign, proposals were solicited from the professional astronomer community. After a rigorous selection process, four proposals were selected and received grants to implement their proposals.

For more information about the LCROSS Observation Campaign, visit <<http://lcross.arc.nasa.gov/observation.htm>>.

## Did You Know?

There are two high tides and two low tides every day on every beach on Earth, because of the moon's pull.

# Future NASA Lunar Missions

## **2011 GRAIL (orbiter)**

NASA's Gravity Recovery and Interior Laboratory (GRAIL) is slated for launch in 2011. GRAIL will fly twin spacecraft, one behind the other, around the moon for several months to make highly detailed measurements of the moon's gravity field needed to understand the moon's structure and dynamics. Scientists plan to use GRAIL's measurements to provide gravity maps that will greatly facilitate NASA's planned human and robotic landings on the moon in the next decade. The moon's poles and far side, where future moon landings are targeted, are the least understood areas in a gravitational sense.

## **2011 LADEE**

Lunar Atmosphere and Dust Environment Explorer is a NASA mission that will orbit the moon. Its main objective is to characterize the atmosphere and lunar dust environment. In addition to the science objectives, the mission will be testing a new spacecraft architecture called the "Modular Common Bus," which is being developed by NASA as a flexible, low-cost, rapid turnaround spacecraft for both orbiting and landing on the moon and other deep space targets.

## Program/Project Oversight

Exploration Systems Mission Directorate, NASA Headquarters, is responsible for programmatic oversight of the LRO and LCROSS missions. The LRO mission will transition to the Science Mission Directorate in 2010.

LRO is a NASA mission with international participation from the Institute for Space Research in Moscow. Russia provides the neutron detector aboard the spacecraft. NASA is also utilizing science data from the Japan Aerospace Exploration Agency's Kaguya lunar orbiter mission, which will enhance the LCROSS mission and the scientific return from LRO.

The Lunar Precursor Robotic Program Office, Marshall Space Flight Center, provides programmatic oversight and management for LRO and LCROSS missions. The LRO Project Office, Goddard Space Flight Center, manages and coordinates day-to-day support for LRO mission development and mission science operations. LCROSS Project Office, Ames Research Center, coordinates day-to-day support for the LCROSS mission including mission development and science and mission operations. Media Services Division, Kennedy Space Center manages launch preparations and operations. Kennedy manages launch-period NASA TV coverage and media relations' activities, in coordination with Goddard and Ames Public Affairs.

### **Did You Know?**

Only 12 people have ever walked on the surface of the moon.









National Aeronautics and Space Administration

**George C. Marshall Space Flight Center**

Huntsville, AL 35812

[www.nasa.gov/marshall](http://www.nasa.gov/marshall)

**[www.nasa.gov](http://www.nasa.gov)**